

Standard Product Specifications

Materials:

Steel

Finish:

Powder Coated

Hand Hole Cover:

Standard on Steel Poles


Pole Height	Pole Bury Depth
8'	2'
10'	
12'	
15'	3'
18'	
20'	4'

The Chart Above is a Guideline

Check With an Engineer for Site Specific Requirements.



Hand Hole 18" Above Ground
Access Hole 18" Below Ground

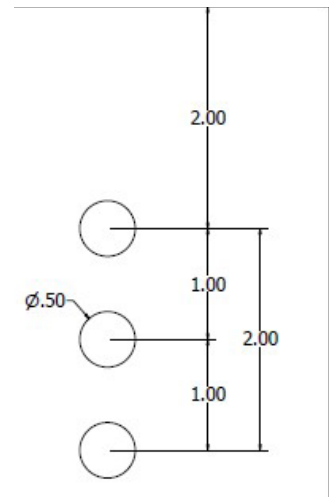

Divine Standard Drill Pattern

MODEL	SHAFT	SCHEDULE	LENGTH	BURY DEPTH	OPTIONS	FINISH
Model POLE-DB-RSP (Round Steel Direct Bury)	Shaft 3 - 3"OD	Schedule/Gauge 40 - Schedule 40	Length(Overall) 8 - 8 Feet 10 - 10 Feet 12 - 12 Feet 15 - 15 Feet 18 - 18 Feet 20 - 20 Feet	Bury Depth BX' - Custom Bury Depth (In Feet)	Options 190 - (1) 90 Degree Hole 2180 - (2) 180 Degree Holes GFCI - GFCI Receptacle GFCILOCK - GFCI Lock TENON 2 3/8 x 3 TENON 3.5 x 3 EYE - Eye Hooks	Finish DB - Dark Bronze BL - Black AS - Anodized Silver WH- White CC - Custom Color

**Customer is responsible for providing fully dimensioned drill patterns when using heads from other manufacturers; otherwise, the standard Divine Lighting drill pattern will be used.

**Customer must specify the orientation of fixtures on the pole when ordering. This information can be found in the options section, e.g. 190, 2180, etc.

**Divine Lighting is not responsible for inconsistencies between poles, fixtures, and parts produced by different manufacturers, and cannot guarantee proper fitting between such components.