

Standard Product Specifications


Materials:
Steel
Finish:
Powder Coated
Hand Hole Cover:

| Pole Height | Pole Bury Depth |
|-------------|-----------------|
| 8' | 2' |
| 10' | |
| 12' | |
| 15' | 3' |
| 18' | |
| 20' | 4' |
| 24' | |
| 30' | 5' |

The Chart Above is a Guideline -
Check With an Engineer for Site
Specific Requirements.



Hand Hole 18" Above
Ground
Access Hole 18" Below
Ground

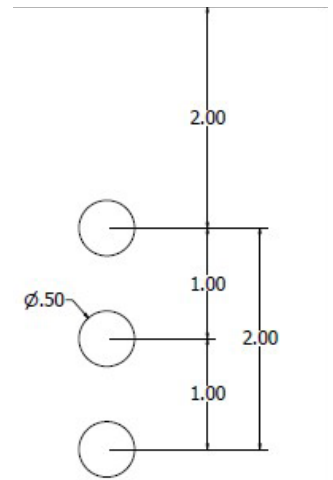

Divine Standard Drill Pattern

| MODEL | SHAFT | SCHEDULE | LENGTH | BURY DEPTH | OPTIONS | FINISH |
|---|--------------------------|---|--|---|--|---|
| Model POLE-DB-RSP (Round Steel Direct Bury) | Shaft 4 - 4"OD | Schedule/Gauge 40 - Schedule 40 | Length(Overall) 8 - 8 Feet 10 - 10 Feet 12 - 12 Feet 15 - 15 Feet 18 - 18 Feet 20 - 20 Feet 30 - 30 Feet | Bury Depth BX - Custom Bury Depth (In Feet) | Options 190 - (1) 90 Degree Hole 2180 - (2) 180 Degree Holes GFCI - GFCI Receptacle GFCILOCK - GFCI Lock TENON 2 3/8 x 3 TENON 3.5 x 3 EYE - Eye Hooks | Finish DB - Dark Bronze BL - Black AS - Anodized Silver WH- White CC - Custom Color |

**Customer is responsible for providing fully dimensioned drill patterns when using heads from other manufacturers; otherwise, the standard Divine Lighting drill pattern will be used.

**Customer must specify the orientation of fixtures on the pole when ordering. This information can be found in the options section, e.g. 190, 2180, etc.

**Divine Lighting is not responsible for inconsistencies between poles, fixtures, and parts produced by different manufacturers, and cannot guarantee proper fitting between such components.