

Standard Product Specifications

**Materials:**

Steel

**Finish:**

Powder Coated

**Hand Hole Cover:**


Standard on Steel Poles

Pole Height	Pole Bury Depth
8'	2'
10'	
12'	
15'	3'
18'	
20'	4'
24'	
30'	5'

The Chart Above is a Guideline - Check With an Engineer for Site Specific Requirements.



Hand Hole 18" Above Ground  
Access Hole 18" Below Ground

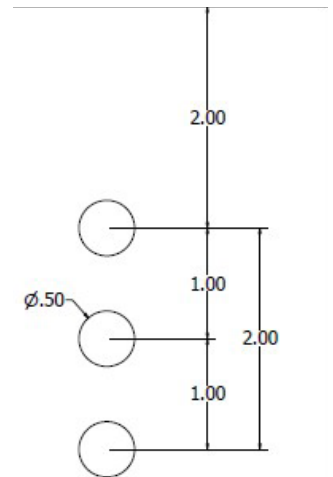

Divine Standard Drill Pattern

MODEL	SHAFT	SCHEDULE	LENGTH	BURY DEPTH	OPTIONS	FINISH
<b>Model</b> <b>POLE-DB-RSP</b> (Round Steel Direct Bury)	<b>Shaft</b> 5 - 5"OD	<b>Schedule/Gauge</b> 40 - Schedule 40	<b>Length (Overall)</b> 8 - 8 Feet 10 - 10 Feet 12 - 12 Feet 15 - 15 Feet 18 - 18 Feet 20 - 20 Feet 30 - 30 Feet	<b>Bury Depth</b> <b>BX</b> - Custom Bury Depth (In Feet)	<b>Options</b> 190 - (1) 90 Degree Hole 2180 - (2) 180 Degree Holes GFCI - GFCI Receptacle GFCILOCK - GFCI Lock TENON 2 3/8 x 3 TENON 3.5 x 3 EYE - Eye Hooks	<b>Finish</b> DB - Dark Bronze BL - Black AS - Anodized Silver WH - White CC - Custom Color

\*\*Customer is responsible for providing fully dimensioned drill patterns when using heads from other manufacturers; otherwise, the standard Divine Lighting drill pattern will be used.

\*\*Customer must specify the orientation of fixtures on the pole when ordering. This information can be found in the options section, e.g. 190, 2180, etc.

\*\*Divine Lighting is not responsible for inconsistencies between poles, fixtures, and parts produced by different manufacturers, and cannot guarantee proper fitting between such components.