

AREA AND SITE LIGHTING

DBELL-TLVR

DIVINE LIGHTING
FABRICATION & POWDER COATING LLC

Standard Product Specifications

Materials:

Cast Aluminum Housing

Finish:

Powder Coated

Lens:

Clear or White Polycarbonate

LED:

Integrated LED Array

Listing:

Wet List to Meet UL 1598 Standard

Driver Info:

120/277V

Installation Information:


Install by Qualified Electrician

Warranty:

2 Years From Date of Shipment

DIMENSIONS:

See Next Page

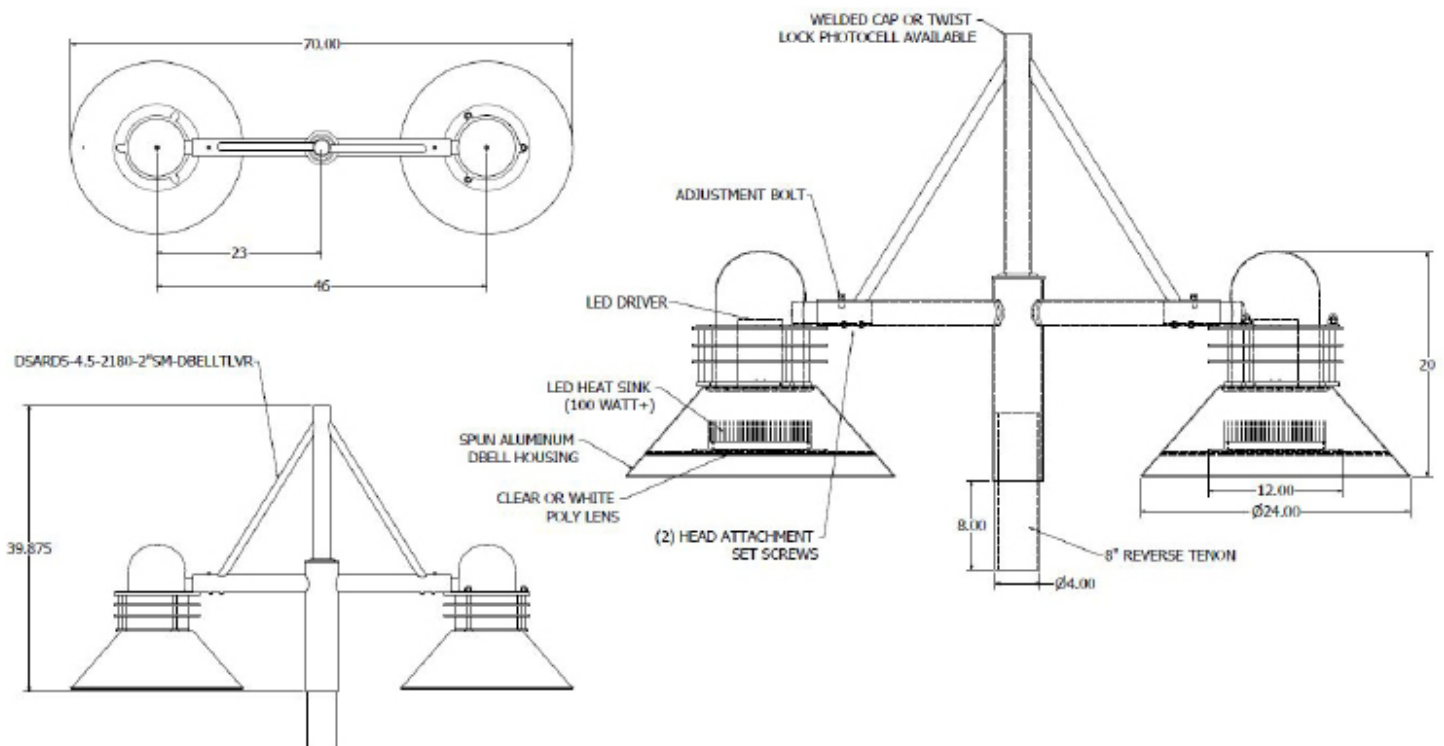

AREA AND SITE LIGHTING

DBELL-TLVR

Standard Product Specifications (Continued)

Materials:

Cast Aluminum Housing

Finish:

Powder Coated

Lens:

Clear or White Polycarbonate

LED:

Integrated LED Array

Listing:

Wet List to Meet UL 1598 Standard

Driver Info:

120/277V

Installation Information:

Install by Qualified Electrician

Warranty:

2 Years From Date of Shipment

DIMENSIONS:

See Below



GN-190

MODEL	FINISH	WATTAGE	KELVIN	LENS	TYPE	OPTIONS
Model DBELL-TLVR	Finish DB - Dark Bronze BL - Black AS - Anodized Silver WH - White CC - Custom Color	Wattage LED50 - 50W LED 5000 Lms LED80 - 75W LED 8000 Lms LED100 - 75W LED 10000 Lms LED120 - 95W LED 12000 Lms LED150 - 100W LED 15000 Lms <i>*Higher Outputs Available - Contact Factory for Details</i>	Kelvin 30 - 30K 35 - 35K 40 - 40K 50 - 50K	Lens CP - Clear Polycarbonate WP - White Polycarbonate	Type II - Type II IIM - Type II Medium III - Type III IIIM - Type III Medium IV - Type IV V - Type V VSQ - Type V Square	Options DIM - 0-10V Dimmable HSS - House Side Shield 190 - Single Head 2180 - Dual Head GN-190 - Gooseneck 190