

BOLLARDS
DBOL060A

Standard Product Specifications

Materials:

Die-Cast Aluminum Housing

Finish:

Powder Coated

Lens:

Clear Glass Diffuser

LED:

Integrated LED Array

Listing:

Wet List to Meet UL 1598 Standard

Driver Info:

120V

Installation Information:

Install by Qualified Electrician

Warranty:

2 Years From Date of Shipment


DIMENSIONS:

31”H - **Standard**

Shaft Diameter - 4.5”D

Head Diameter - 8.5”D

(Custom Heights Available - Call Customer Service)

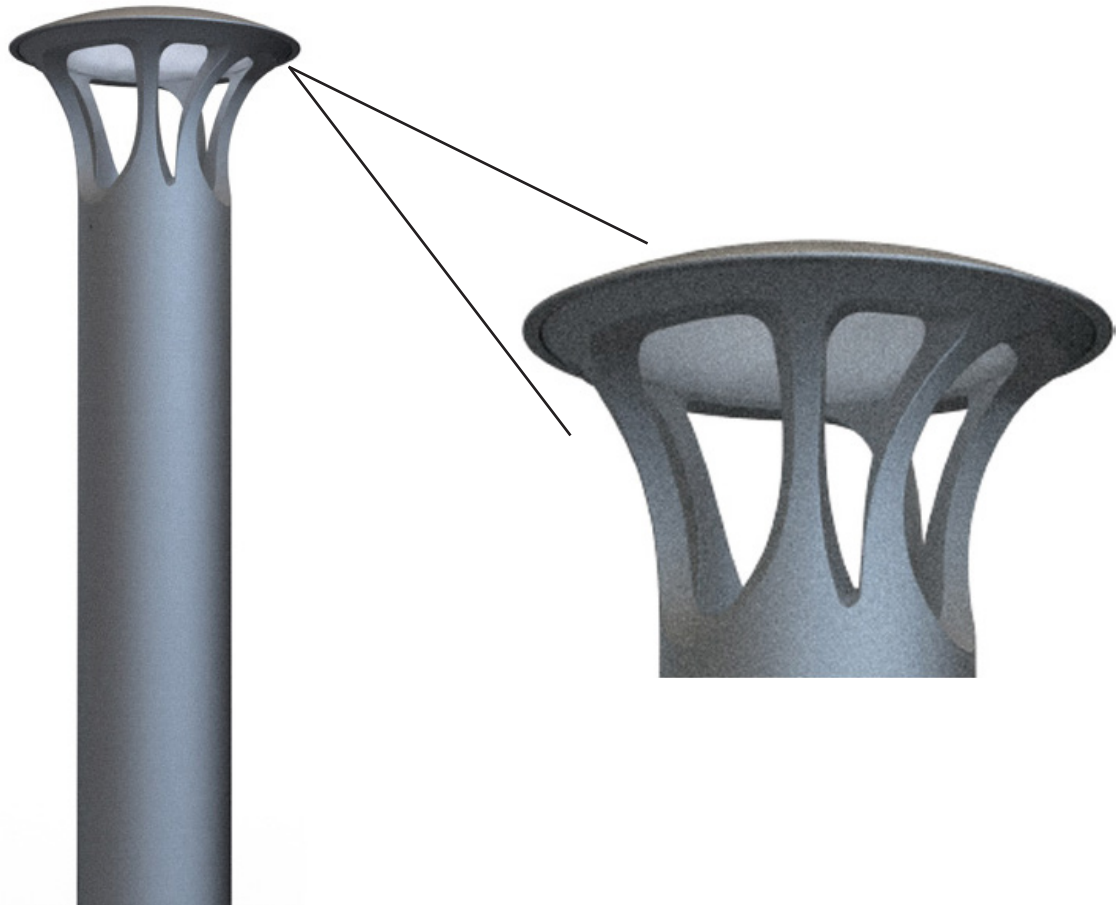

MODEL	FINISH	WATTAGE	KELVIN	HEIGHT	OPTIONS
Model DBOL060A	Finish DB - Dark Bronze BL - Black AS - Anodized Silver WH- White CC - Custom Color	Wattage LED10 - 10W LED 600 Lms LED15 - 15W LED 900 Lms LED20 - 20W LED 1200 Lms	Kelvin 30 - 30K 40 - 40K 50 - 50K	Height 16” 24” 31” (Standard) XX - Custom Height in Inches	Options DV - Dual Volt 120/277V DIM - 0-10V Dimmable PC - Photocell EM5 - 500 Lms Emergency EM10 - 1000 Lms Emergency EM12 - 1200 Lms Emergency DBE - Direct Bury Extension