

DIRECT / INDIRECT D/I-LPS & D/I-LPB



DIMENSIONS:
48" L x 7.75" W x 2" H

Project:	
Location(s):	
Type:	
Qty:	
Date:	

PRODUCT SPECIFICATIONS

Description:
Ambient Lighting For an Office or Task Area

Materials:
Heavy Gauge Cold-Rolled Steel Housing

Finish:
Powder Coated

Lens:
White Opal Acrylic Diffuser



LED:
Integrated LED Array

Listing:
Dry List to Meet UL 1598 Standard

Driver Info:
120V

Installation Information:
Install by Qualified Electrician

Warranty:
2 Years From Date of Shipment

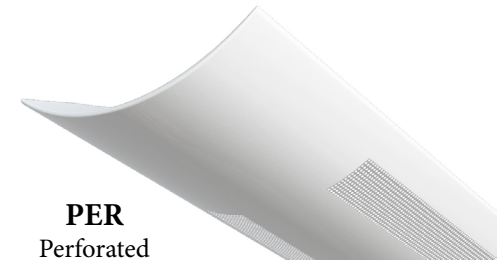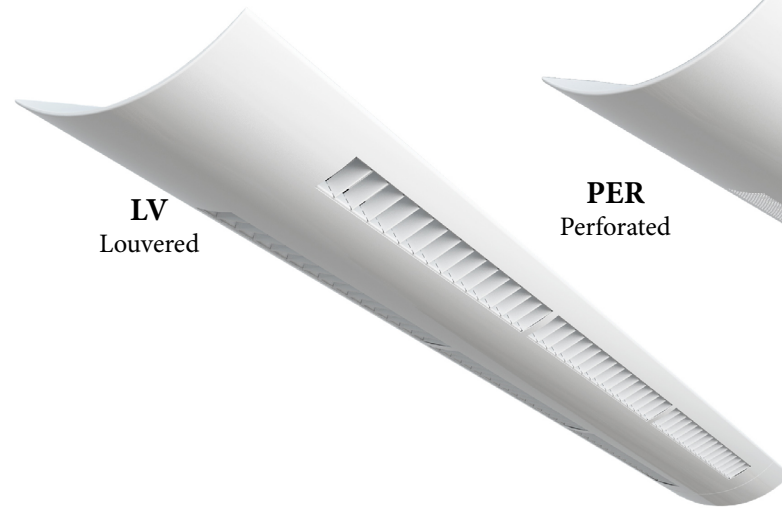

Also available in LED tube lamps

ORDER INFORMATION

Call Factory For Fluorescent Options

MODEL	FINISH	WATTAGE	KELVIN	MOUNT	OUTER ROW	LENGTH	OPTIONS
Model D/I-LPB D/I-LPS	Finish DB - Dark Bronze BL - Black AS - Anodized Silver WH - White CC - Custom Color	Wattage LED64 - 64W LED 6400 Lms LED128 - 128W LED 12800 Lms	Kelvin 30 - 30K 35 - 35K 40 - 40K	Mount AC50 - 50" Aircraft Cable PDXX - Pendant Mount Replace XX with desired length of pendant rods	Outer Row (Sides) PER - Perforated LV - Louvered (T5 only)	Length Multiples of 4' 4 - 4 Foot XX - Multiples of 4 Foot	Options DV - 120/277 Dual Volt MOT - Motion Sensor EM - Emergency Backup EM5 - 500 Lm Emergency EM12 - 1200 Lm Emergency DIM0-10V - 0-10V Dimmable