

Standard Product Specifications

Materials:

Listing: Wet List to Meet UL 1598 Standard **Aluminum Housing**

Driver Info: Finish: Powder Coated 120/277V


Installation Information: Lens: Optics Install by Qualified Electrician LED: Warranty:

Integrated LED Array 2 Years From Date of Shipment

DIMENSIONS: 18.16"W x 39.04"H





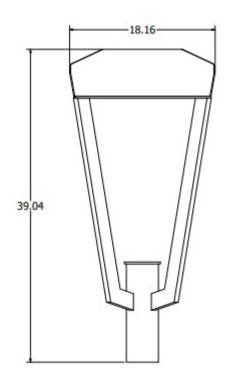

Mounts on 3" Pole/Tenon

MODEL	FINISH	WATTAGE	KELVIN	TYPE	OPTIONS
Model DPT023S	Finish DB - Dark Bronze BL - Black AS - Anodized Silver WH- White CC - Custom Color	Wattage LED40 - 20W LED 4000 Lms LED60 - 30W LED 6000 Lms LED80 - 45W LED 8000 Lms LED100 - 60W LED 10000 Lms LED120 - 80W LED 12000 Lms	Kelvin 30 - 30K 35 - 35K 40 - 40K 50 - 50K	Type II - Type II IIM - Type II Medium III - Type III IIIM - Type III IIIM - Type III Medium IV - Type IV V - Type V VSQ - Type V Square	Options DIM - 0-10V Dimmable PC - Photocell MOT - Motion Sensing

Divine Lighting Fabrication & Powder Coating, LLC. Conroe, TX

http://www.divinelighting.net customerservice@divinelighting.net PH: 936-494-3900 FX: 936-494-3910