

Standard Product Specifications

Materials:

Aluminum Housing

Finish:

Powder Coated

Lens:

White Acrylic

LED:

Integrated LED Array

Listing:

Wet List to Meet UL 1598 Standard

Driver Info:

120/277V

Installation Information:

Install by Qualified Electrician

Warranty:

2 Years From Date of Shipment

DIMENSIONS:


6" Dia. x 17"H - See More
Dimensions Below




See More Options on Next Page

MODEL	STYLE	LOUVERS	FINISH	WATTAGE	KELVIN	OPTIONS
Model SOL	Style S - Standard F - Flat C - Cone ST - Standard Top FT - Flat Top CT - Cone Top Options Can Be Combined - EX: SOLA-F-C	Louvers(Optional) LVT - Top Louvers LVB - Bottom Louvers Leave Empty for No Louvers	Finish DB - Dark Bronze BL - Black AS - Anodized Silver WH- White CC - Custom Color	Wattage LED30 - 30W LED 3000 Lms LED40 - 40W LED 4000 Lms LED50 - 50W LED 5000 Lms LED70 - 70W LED 7000 Lms LED100 - 100W LED 10000 Lms LED150 - 150W LED 15000 Lms	Kelvin 30 - 30K 35 - 35K 40 - 40K 50 - 50K	Options S90 - 90 Degree Shield S180 - 180 Degree Shield


Part Number Examples

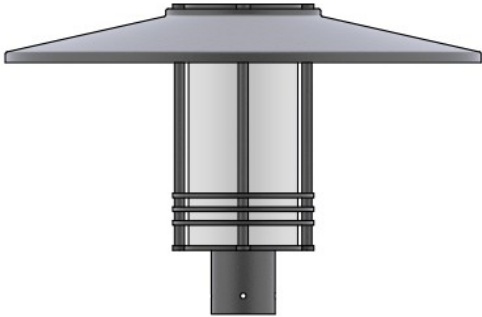


SOLA-ST-LVB

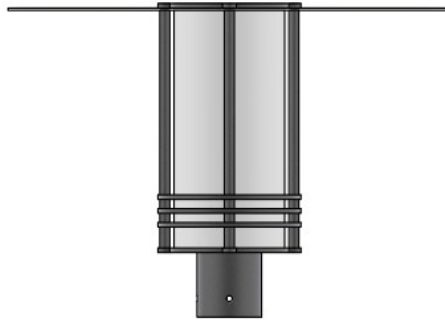


SOLA-FT-LVB

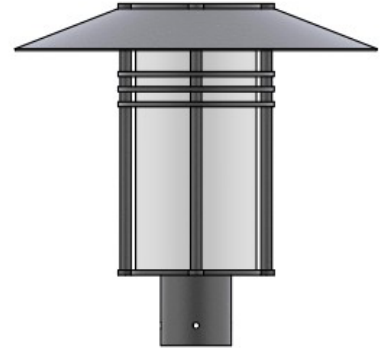


SOLA-CT-LVT

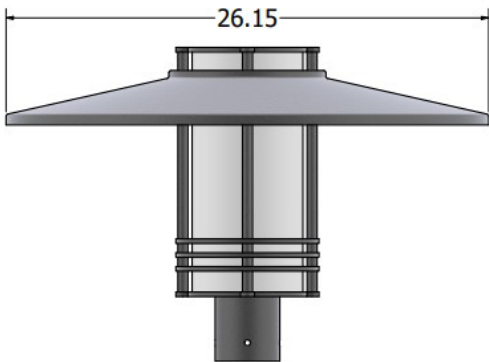


SOLA-S-LVB

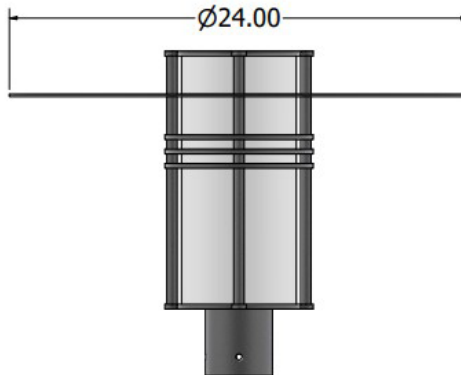


SOLA-F-LVT

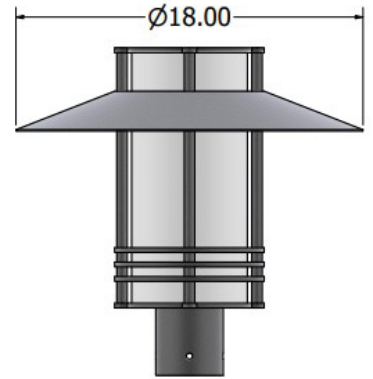

SOLA-C-LVB

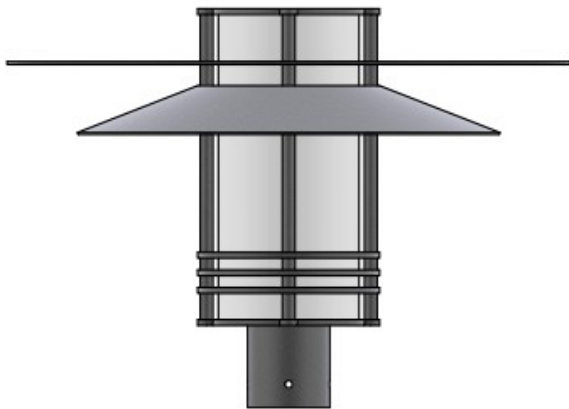

SOLA-F-C-LVB

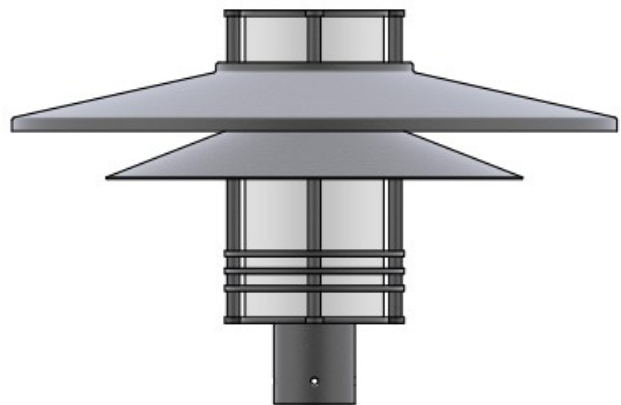

SOLA-S-C-LVB