



# DIVINE LIGHTING

FABRICATION & POWDER COATING LLC

## PRODUCT CATALOG

2026 EDITION



# Table of Contents

---

**AREA & SITE LIGHTING** ..... 3

Outdoor Illumination for Large-Scale Spaces

**POST TOP LIGHTING** ..... 7

Decorative Lighting for Poles & Pathways

**PENDANTS & CHANDELIERS** ..... 12

Decorative Lighting for Interior Spaces

**BOLLARDS** ..... 19

Low-Level Lighting for Pathways & Landscapes

**POLE LIGHTS** ..... 29

High-Output Lighting for Streets & Parking Areas

**WALL SCONCES** ..... 32

Architectural & Decorative Indoor/Outdoor Wall Lighting

**WALLPACKS** ..... 38

Durable Exterior Security & Utility Lighting

**CUSTOM CREATIONS** ..... 42

Tailored Lighting Solutions and Custom Designs



---

# AREA & SITE LIGHTING



### AREA18

**Available Wattages:** 20W - 80W Range  
**Available Lumens:** 4,000 - 12,000 Lms  
**Available Kelvin:** 30K/35K/40K/50K  
**Options:** Motion, Dimming, Photocell



### DBELL

**Available Wattages:** 20W - 80W  
**Available Lumens:** 4,000 - 12,000 Lms  
**Available Kelvin:** 30K/35K/40K/50K  
**Options:** Dimming, House Side Shield




### DBELL-TLVR

**Available Wattages:** 50W - 100W  
**Available Lumens:** 4,000 - 12,000 Lms  
**Available Kelvin:** 30K/35K/40K/50K  
**Options:** Dimming, House Side Shield



### SBELL

**Available Wattages:** 50W - 100W  
**Available Lumens:** 4,000 - 12,000 Lms  
**Available Kelvin:** 30K/35K/40K/50K  
**Options:** Dimming, House Side Shield

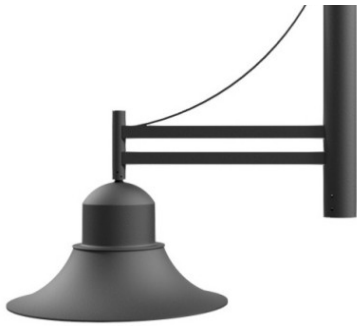

**LBELL**

**Available Wattages:** 20W - 80W  
**Available Lumens:** 4,000 - 12,000 Lms  
**Available Kelvin:** 30K/40K/50K  
**Options:** Dimming, House Side Shield, Motion




**LBELL-LV**

**Available Wattages:** 45W  
**Available Lumens:** 4,500 Lms  
**Available Kelvin:** 30K/40K/50K  
**Options:** Dimming, House Side Shield, Motion



**LBELL027**

**Available Wattages:** 60W - 150W  
**Available Lumens:** 6,000 - 22,000 Lms  
**Available Kelvin:** 30K/35K/40K/50K  
**Options:** Dimming, House Side Shield, Photocell, Motion

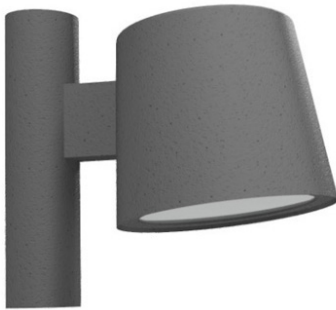

**BK10**

**Available Wattages:** 10W - 25W  
**Available Lumens:** 1,000 - 4,000 Lms  
**Available Kelvin:** 30K/40K  
**Options:** Dimming, Photocell



**DPT38**

**Available Wattages:** 30W - 60W  
**Available Lumens:** 4,000 - 12,000 Lms  
**Available Kelvin:** 30K/40K/50K  
**Options:** Dimming, Photocell



**DSL009**

**Available Wattages:** 20W - 150W  
**Available Lumens:** 2,000 - 15,000 Lms  
**Available Kelvin:** 30K/35K/40K/50K  
**Options:** Motion, House Side Shield



**DSL010**

**Available Wattages:** 75W - 320W  
**Available Lumens:** 11,250 - 48,000 Lms  
**Available Kelvin:** 30K/35K/40K/50K  
**Options:** Photocell, House Side Shield



**EPTS101-CBLH**

**Available Wattages:** 25W - 98W  
**Available Lumens:** 2,900 - 10,500 Lms  
**Available Kelvin:** 30K/35K/40K/50K  
**Options:** Dimming, Photocell, Motion



**EPTS101D**

**Available Wattages:** 25W - 98W  
**Available Lumens:** 2,900 - 10,500 Lms  
**Available Kelvin:** 30K/35K/40K/50K  
**Options:** Dimming, Photocell, Motion



**HSAM**

**Available Wattages:** 20W - 50W  
**Available Lumens:** 2,100 - 4,800 Lms  
**Available Kelvin:** 30K/40K/50K  
**Options:** Dimming



**LFSQ**

**Available Wattages:** 21W - 128W  
**Available Lumens:** 2,100 - 12,800 Lms  
**Available Kelvin:** 30K/35K/40K/50K  
**Options:** Dimming, Photocell, Emergency Backup



**MSL8**

**Available Wattages:** 100W - 400W  
**Available Lumens:** 15,600 - 60,000 Lms  
**Available Kelvin:** 30K/40K/50K  
**Options:** Dimming, Photocell, Motion, House Side Shield



---

# POST TOP LIGHTING

## AREA18PT

**Available Wattages:** 20W - 80W Range

**Available Lumens:** 4,000 - 12,000 Lms

**Available Kelvin:** 30K/35K/40K/50K

**Options:** Motion, Dimming, Photocell



## DOME044

**Available Wattages:** 30W - 95W  
**Available Lumens:** 3,000 - 9,500 Lms

**Available Kelvin:** 40K/50K

**Options:** Dimming, Photocell



## DPT009S

**Available Wattages:** 20W - 80W  
**Available Lumens:** 4,000 - 12,000 Lms

**Available Kelvin:** 30K/40K/50K

**Options:** Dimming, House Side Shield,  
Photocell, Motion



## DPT014

**Available Wattages:** 40W - 100W  
**Available Lumens:** 3,200 - 8,000 Lms  
**Available Kelvin:** 30K/35K/40K/50K

**Options:** N/A



**DPT020**

**Available Wattages:** 20W - 80W  
**Available Lumens:** 4,000 - 12,000 Lms  
**Available Kelvin:** 30K/40K/50K  
**Options:** Dimming, House Side Shield, Motion, Photocell



**DPT022**

**Available Wattages:** 20W - 80W  
**Available Lumens:** 4,000 - 12,000 Lms  
**Available Kelvin:** 30K/40K/50K  
**Options:** Dimming, House Side Shield, Motion, Photocell



**DPT023**

**Available Wattages:** 20W - 80W  
**Available Lumens:** 4,000 - 12,000 Lms  
**Available Kelvin:** 30K/40K/50K  
**Options:** Dimming, House Side Shield, Motion, Photocell



**DPT023S**

**Available Wattages:** 20W - 80W  
**Available Lumens:** 4,000 - 12,000 Lms  
**Available Kelvin:** 30K/40K/50K  
**Options:** Dimming, House Side Shield, Motion, Photocell



**DPT0404**

**Available Wattages:** 45W - 150W  
**Available Lumens:** 4,500 - 15,000 Lms  
**Available Kelvin:** 30K/40K/50K  
**Options:** Motion 50%, Photocell, House Side Shield 180°



**DPT520**

**Available Wattages:** 20W - 80W  
**Available Lumens:** 4,000 - 12,000 Lms  
**Available Kelvin:** 30K/40K/50K  
**Options:** Dimming, House Side Shield, Motion, Photocell



**DPT-F44**

**Available Wattages:** 30W - 95W  
**Available Lumens:** 3,000 - 9,500 Lms  
**Available Kelvin:** 30K/35K/40K/50K  
**Options:** Dimming



**DPTMPL**

**Available Wattages:** 52W - 130W  
**Available Lumens:** 7,644 - 16,380 Lms  
**Available Kelvin:** 30K/40K/50K  
**Options:** Motion



**DPTSL**

**Available Wattages:** 45W - 130W  
**Available Lumens:** 5,500 - 15,800 Lms  
**Available Kelvin:** 30K/40K/50K  
**Options:** House Side Shield, Photocell, Motion



**DVT225**

**Available Wattages:** 40W - 100W  
**Available Lumens:** 4,000 - 10,000 Lms  
**Available Kelvin:** 30K/40K/50K  
**Options:** Dimming, Photocell



**EPTS101A**

**Available Wattages:** 25W - 98W  
**Available Lumens:** 2,900 - 10,500 Lms  
**Available Kelvin:** 30K/35K/40K/50K  
**Options:** Dimming, Photocell, Motion



**EPTS101B**

**Available Wattages:** 25W - 98W  
**Available Lumens:** 2,900 - 10,500 Lms  
**Available Kelvin:** 30K/35K/40K/50K  
**Options:** Dimming, Photocell, Motion



**EPTS101C**

**Available Wattages:** 25W - 98W  
**Available Lumens:** 2,900 - 10,500 Lms  
**Available Kelvin:** 30K/35K/40K/50K  
**Options:** Dimming, Photocell, Motion



**GENESIS**

**Available Wattages:** 20W - 80W  
**Available Lumens:** 4,000 - 12,000 Lms  
**Available Kelvin:** 30K/35K/40K/50K  
**Options:** Dimming, Photocell, Motion



**IMPERIAL**

**Available Wattages:** 40W - 72W  
**Available Lumens:** 4,668 - 8,608 Lms  
**Available Kelvin:** 30K/35K/40K/50K  
**Options:** Dimming, House Side Shield, Photocell



**P0600**

**Available Wattages:** SINC, 36W  
**Available Lumens:** 3,600 Lms(36W)  
**Available Kelvin:** 30K/35K/40K/50K  
**Options:** 120/277V



**P0812**

**Available Wattages:** 60W - 72W  
**Available Lumens:** 6,730 - 8,600 Lms  
**Available Kelvin:** 30K/40K/50K  
**Options:** 90°/180° Shield



**PTC**

**Available Wattages:** 32W - 60W  
**Available Lumens:** 3,200 - 6,700 Lms  
**Available Kelvin:** 27K/30K/35K/40K/50K  
**Options:** Dimming



**SOL**

**Available Wattages:** 20W - 100W  
**Available Lumens:** 2,000 - 15,000 Lms  
**Available Kelvin:** 30K/35K/40K/50K  
**Options:** 90°/180° Shield



**SOLA-OP**

**Available Wattages:** 20W - 80W  
**Available Lumens:** 4,000 - 10,000 Lms  
**Available Kelvin:** 30K/40K/50K  
**Options:** Photocell, House Side Shield, Motion



**SOLA-OP-4**

**Available Wattages:** 20W - 80W  
**Available Lumens:** 4,000 - 12,000 Lms  
**Available Kelvin:** 30K/35K/40K/50K  
**Options:** Dimming, Photocell, Motion



**SOLA**

**Available Wattages:** 20W - 100W  
**Available Lumens:** 3,000 - 15,000 Lms  
**Available Kelvin:** 30K/35K/40K/50K  
**Options:** 90°/180° Shield



**SOLA-ST**

**Available Wattages:** 20W - 100W  
**Available Lumens:** 3,000 - 15,000 Lms  
**Available Kelvin:** 30K/35K/40K/50K  
**Options:** 90°/180° Shield



---

# PENDANTS & CHANDELIERS

**ZEPLYN**

**Available Wattages:** 16W  
**Available Lumens:** 1,600 Lms  
**Available Kelvin:** 30K/35K/40K/50K  
**Options:** Emergency Backup  
**Mount:** Pendant



**CBXBX**

Single Incandescent Socket



**CCP**

Single Incandescent Socket



**CLAIRBORNE**

**Available Wattages:** 40W or 78W  
**Available Lumens:** 4,000 - 7,800 Lms  
**Available Kelvin:** 30K/35K/40K/50K  
**Mount:** Cord/Pendant/AC Cable Mount




**CLP**

Lamps Not Included  
Multiple Cage, Can, and Wire Finish Options  
Clear, Champagne, or Smoked Glass



**CPB3**

Triple Incandescent Socket  
Clear Acrylic Lens

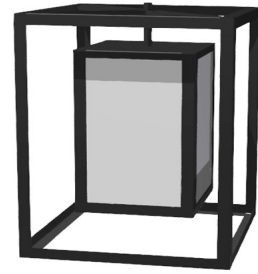

**DBLBX**

Available Wattages: 20W or 40W  
Available Lumens: 2,000 - 4,000 Lms  
Available Kelvin: 30K/35K/40K/50K  
Options: 120/277V  
Mount: Pendant/AC Cable



**DNC**

Available Wattages: 5W - 30W  
Available Lumens: 500 - 3,000 Lms  
Available Kelvin: 30K/35K/40K/50K  
Options: 120/277V, Dimming, Photocell,  
Emergency Backup  
Mount: Cord/Pendant



**DNCSQ**

Available Wattages: 5W - 15W  
Available Lumens: 500 - 1,500 Lms  
Available Kelvin: 30K/40K/50K  
Options: 120/277V, Dimming  
Mount: Pendant/Cord



**HAYSTACK**

Available Wattages: 20W  
Available Lumens: 2,000 Lms  
Available Kelvin: 30K/35K/40K/50K  
Mount: AC Cable



**HEL**

Available Wattages: 4.2W (Per Foot)  
Available Lumens: 350 Lms (Per Foot)  
Available Kelvin: 30K/40K  
Mount: Pendant/AC Cable



**HELXX**

Available Wattages: 4.2W (Per Foot)  
Available Lumens: 350 Lms (Per Foot)  
Available Kelvin: 30K/40K  
Mount: Pendant/AC Cable



**LUNA**

Artistic & Architectural Custom Pendant Lighting Solution. Comprised of Shades at Varying Suspension Heights with Dark Exterior and Gold Interior. Contact For More Details.



**MDOME**

Single or Triple Incandescent Socket  
Depending On Size.  
**Mount:** Pendant/Chain



**MHSK**

**Available Wattages:** 10W  
**Available Lumens:** 1,000 Lms  
**Available Kelvin:** 30K/40K/50K  
**Options:** 120/277V  
**Mount:** AC Cable/Pendant




**NESLONIAN**

Triple Incandescent Socket  
**Mount:** Pendant/AC Cable



**ODCR**

Single Incandescent Socket  
**Mount:** Pendant/Chain

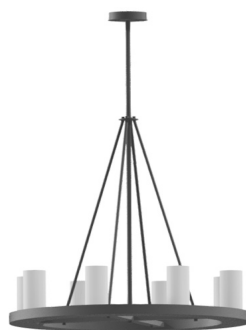

**OKLAHOMA**

(8) Medium Base Sockets  
**Mount:** Pendant



**PD4180**

**Available Wattages:** 9W  
**Available Lumens:** 800 Lms  
**Mount:** 6' Silver Pendant Cable  
& (1) Pendant Rod



**PD4187**

**Available Wattages:** 9W  
**Available Lumens:** 800 Lms  
**Mount:** 6' Cord




**PD4308**

Single Incandescent Socket or GU24 Socket  
**Mount:** 42" Pendant



**PD4336**

**Available Wattages:** 18W  
**Available Lumens:** 1,440 Lms  
**Available Kelvin:** 30K/40K

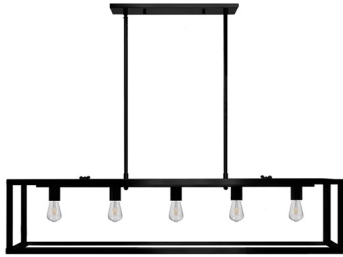

**PEN5**

(5) Incandescent Sockets  
**Mount:** Expandable Pendant Rods



**PENBOWL**

**Available Wattages:** 35W  
**Available Lumens:** 3,500 Lms  
**Available Kelvin:** 30K/40K/50K  
**Mount:** Pendant/AC Cable



**PENBALL**

Single Incandescent Bulb  
**Available Kelvin:** 30K/40K/50K  
**Mount:** Pendant/Cord



**PENCYL**

**Available Wattages:** 10W - 20W  
**Available Lumens:** 1,000 - 2,000 Lms  
**Available Kelvin:** 30K/40K/50K  
**Mount:** Pendant  
**Options:** 120/277V, Dimming



**PENROSE**

**Available Wattages:** 10W  
**Available Lumens:** 1,000 Lms  
**Available Kelvin:** 30K/35K/40K/50K  
**Options:** 120/277V, Dimming  
**Mount:** Pendant



**PENTUBE**

**Available Wattages:** 15W - 40W  
**Available Lumens:** 1,500 - 3,800 Lms  
**Available Kelvin:** 30K/40K  
**Options:** 120/277V, Dimming  
**Mount:** AC Cable/Pendant/Cord




**PENSHADE**

**Available Wattages:** Dependant on Size -  
 Contact Customer Service  
**Available Kelvin:** 30K/40K/50K  
 Multiple Lens/Shade Options  
**Options:** 120/277V  
**Mount:** 50" AC Cable/Pendant/Chain Hung/  
 Pendant W/ 1/2" Down Rod



**PUSK**

**Available Wattages:** (5) LED5 or (6) LED5  
**Available Lumens:** 2,500 or 3,000 Lms  
**Available Kelvin:** 30K/40K  
**Mount:** AC Cable Mount

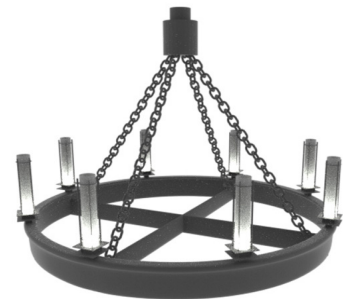

**RENAISSANCE**

(8) GU24 or (8) Incandescent Sockets  
**Available Kelvin:** 30K/35K/40K/50K  
**Mount:** Cord/Chain



**SAMPSON**

**Available Wattages:** 60W - 120W  
**Available Lumens:** 6,000 - 12,000 Lms  
**Available Kelvin:** 30K/35K/40K/50K  
**Options:** 120/277V, Dimming  
**Mount:** Pendant



**SHG16**

**Single Incandescent Socket**  
**Mount:** Pendant



**SOLAPD**

**Available Wattages:** 40W - 70W  
**Available Lumens:** 4,000 - 6,000 Lms  
**Available Kelvin:** 30K/35K/40K/50K  
**Options:** 90°/180° Shield  
**Mount:** Pendant/Cable




**SWC**

**Available Wattages:** 40W  
**Available Lumens:** 4,000 Lms  
**Available Kelvin:** 30K/35K/40K/50K  
**Options:** 120/277V, Dimming  
**Mount:** Pendant/AC Cable



**THP12**

**Available Wattages:** 7W or 12W  
**Available Lumens:** 700 - 1,200 Lms  
**Available Kelvin:** 30K/40K/60K  
**Mount:** Pendant

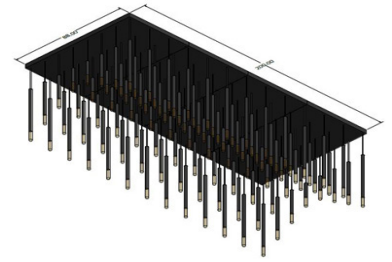

**TTC**

**5W MR16 GU10**  
**Available Kelvin:** 27K/30K/35K/40K/50K  
**\*Lamps Not Included\***



**TURBINE**

**(10) GU24 Sockets**  
**Available Kelvin:** 27K/35K/41K  
**Options:** Wet Listed  
**Mount:** Pendant Drop 64"



**WLIN**

**Available Wattages:** 30W or 60W  
**Available Lumens:** 1,350 - 2,725 Lms  
**Available Kelvin:** 30K/40K/50K  
**Mount:** Pendant/AC Cable/Catenary



**WOOD RING**

**Available Wattages:** 20W - 40W  
**Available Lumens:** 2,000 - 4,000 Lms  
**Available Kelvin:** 30K/40K/50K  
**Options:** Direct/Indirect Up/Down Light  
**Mount:** Ceiling/50" AC Cable/Catenary



## WRSQ

**Available Wattages:** Contact Customer Service

**Available Kelvin:** 30K/40K/50K

**Options:** 120/277V, Direct/Indirect Up/Down Light, Wet Listed

**Mount:** Ceiling/50" AC Cable/Catenary



---

# BOLLARDS

**BOLSW/BOLSS**

**Available Wattages:** 5W or 10W  
**Available Lumens:** 500 - 1,000 Lms  
**Available Kelvin:** 30K/40K/50K  
**Options:** 120/277V, Dimmable, Photocell



**BODG/BOFG**

**Available Wattages:** 15W  
**Available Lumens:** 1,500 Lms  
**Available Kelvin:** 30K/40K/50K  
**Options:** Dimming, 90°/180° Shield, Emergency Backup, Direct Bury Extension, Photocell



**BODL/BODR/BODSL**

**Available Wattages:** 15W  
**Available Lumens:** 1,500 Lms  
**Available Kelvin:** 30K/40K/50K  
**Options:** Dimming, 90°/180° Shield, Emergency Backup, Direct Bury Extension, Photocell



**BODLS**

**Available Wattages:** 40W  
**Available Lumens:** 4,000 Lms  
**Available Kelvin:** 30K/40K/50K  
**Options:** Dimming, Emergency Backup



**BODR/BOFR**

**Available Wattages:** 15W  
**Available Lumens:** 1,500 Lms  
**Available Kelvin:** 30K/40K/50K  
**Options:** Dimming, 90°/180° Shield, Emergency Backup, Direct Bury Extension, Photocell



**BODL/BOFL**

**Available Wattages:** 15W  
**Available Lumens:** 1,500 Lms  
**Available Kelvin:** 30K/40K/50K  
**Options:** Dimming, 90°/180° Shield, Emergency Backup, Direct Bury Extension, Photocell



**BOFRSW**

**Available Wattages:** 15W  
**Available Lumens:** 1,500 Lms  
**Available Kelvin:** 30K/40K/50K  
**Options:** 120/277V, Dimming, 90°/180° Shield, Emergency Backup, Direct Bury Extension



**BOL08**

**Available Wattages:** 10W or 20W  
**Available Lumens:** 1,000 - 2,000 Lms  
**Available Kelvin:** 30K/35K/40K/50K  
**Options:** 120/277V, Dimming, Photocell



**BOL009**

**Available Wattages:** 10W or 26W  
**Available Lumens:** 1,400 - 3,200 Lms  
**Available Kelvin:** 30K/40K/50K  
**Options:** Photocell, Emergency Backup



**BOL010B**

**Available Wattages:** 10W or 15W  
**Available Lumens:** 1,000 - 1,500 Lms  
**Available Kelvin:** 30K/35K/40K/50K  
**Options:** Dimming, Emergency Backup



**BOL20QRD**

**Available Wattages:** 12W - 25W  
**Available Lumens:** 1,500 - 3,150 Lms  
**Available Kelvin:** 30K/40K/50K  
**Options:** Dimming, Motion Sensing



**BOL20QSQ**

**Available Wattages:** 14W - 40W  
**Available Lumens:** 500 - 1,000 Lms  
**Available Kelvin:** 30K/40K/50K  
**Options:** Dimming, Emergency Backup



**BOL023S**

**Available Wattages:** 10W - 25W  
**Available Lumens:** 1,000 - 4,000 Lms  
**Available Kelvin:** 30K/35K/40K/50K  
**Options:** 120/277V, Dimming, Photocell, Emergency Backup



**BOL038B**

**Available Wattages:** 15W  
**Available Lumens:** 900 Lms  
**Available Kelvin:** 30K/35K/40K/50K  
**Options:** 120/277V, Dimming, Photocell, Emergency Backup



**BOL043**

**Available Wattages:** 25W  
**Available Lumens:** 2,500 Lms  
**Available Kelvin:** 30K/35K/40K/50K  
**Options:** 120/277V, Dimming, Photocell, Emergency Backup




**BOLCAOP**

**Available Wattages:** 10W - 25W  
**Available Lumens:** 1,000 - 4,000 Lms  
**Available Kelvin:** 30K/35K/40K/50K  
**Options:** 120/277V, Dimming



**BOLCLMN**

**Available Wattages:** 15W or 25W  
**Available Lumens:** 1,500 - 2,500 Lms  
**Available Kelvin:** 30K/35K/40K/50K  
**Options:** Photocell, Emergency Backup

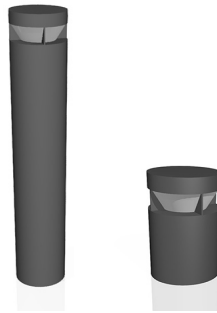

**BOLCN/BOLCNSM**

**Available Wattages:** 10W or 15W  
**Available Lumens:** 1,000 - 1,500 Lms  
**Available Kelvin:** 30K/40K/50K  
**Options:** 120/277V, Dimming



**BOLDC**

**Available Wattages:** 10W - 22W  
**Available Lumens:** 1,000 - 2,200 Lms  
**Available Kelvin:** 30K/40K/50K  
**Options:** 120/277V, Dimming, Photocell, Emergency Backup



**BOLDCSW**

**Available Wattages:** 5W or 10W  
**Available Lumens:** 500 - 1,000 Lms  
**Available Kelvin:** 30K/35K/40K/50K  
**Options:** 120/277V, 90°/180° House Side Shield



**BOLDIAG**

**Available Wattages:** 40W  
**Available Lumens:** 4,000 Lms  
**Available Kelvin:** 30K/40K  
**Options:** Dimming, Emergency Backup, Photocell



**BOLDPS**

**Available Wattages:** 12W  
**Available Lumens:** 1,200 Lms  
**Available Kelvin:** 30K/40K/50K  
**Options:** Dimming, Photocell, Emergency Backup, GFCI Receptacle



**BOLEDG**

Available Wattages: 20W  
Available Lumens: 2,000 Lms  
Available Kelvin: 30K/35K/40K/50K  
Options: 120/277V



**BOLEDS**

Available Wattages: 6W - 40W  
Available Lumens: 423 - 2,400 Lms  
Available Kelvin: 30K/40K  
Options: Dimming



**BOLEH**

Available Wattages: 20W  
Available Lumens: 2,000 Lms  
Available Kelvin: 30K/40K/50K  
Options: Dimming, Emergency Backup



**BOLGR**

Available Wattages: 35W  
Available Lumens: 3,500 Lms  
Available Kelvin: 30K/40K/50K  
Options: Aluminum Reflector




**BOL-LAT**

Available Wattages: 10W  
Available Lumens: 1,000 Lms  
Available Kelvin: 30K/35K/40K/50K  
Options: 120/277V, Dimming, Emergency Backup, GFCI Receptacle



**BOLNAU**

Available Wattages: 10W  
Available Lumens: 1,000 Lms  
Available Kelvin: 30K/35K/40K/50K  
Options: 120/277V, Dimming, Photocell



**BOLO**

Available Wattages: 10W  
Available Lumens: 1,200 Lms  
Available Kelvin: 30K/40K/50K  
Options: Dimming, Photocell



**BOLOPWM**

Available Wattages: 10W or 15W  
Available Lumens: 1,000 - 1,500 Lms  
Available Kelvin: 30K/35K/40K/50K  
Options: 120/277V, Photocell, 24V Remote Driver



**BOLPF/BOLPA**

Available Wattages: 10W or 15W  
Available Lumens: 1,000 - 1,500 Lms  
Available Kelvin: 30K/35K/40K/50K  
Options: 120/277V, Emergency Backup



**BOLQB1**

**Available Wattages:** 16W - 34W  
**Available Lumens:** 1,500 - 3,200 Lms  
**Available Kelvin:** 30K/40K  
**Options:** Dimming, Photocell, Emergency Backup, GFCI Receptacle



**BOLQB10Q**

**Available Wattages:** 10W - 28W  
**Available Lumens:** 1,000 - 2,800 Lms  
**Available Kelvin:** 30K/35K/40K/50K  
**Options:** Dimming, Emergency Backup



**BOLQDS**

**Available Wattages:** 19W  
**Available Lumens:** 700 Lms  
**Available Kelvin:** 30K/40K/50K  
**Options:** Dimming, 180° House Side Shield, Emergency Backup



**BOLRB8**

**Available Wattages:** 10W - 25W  
**Available Lumens:** 1,000 - 4,000 Lms  
**Available Kelvin:** 30K/40K/50K  
**Options:** Dimming, Photocell, GFCI Receptacle, Emergency Backup



**BOLRDLV**

**Available Wattages:** 10W or 20W  
**Available Lumens:** 1,000 - 2,000 Lms  
**Available Kelvin:** 30K/35K/40K/50K  
**Options:** 120/277V, Emergency Backup



**BOLRDOP**

**Available Wattages:** 10W or 15W  
**Available Lumens:** 1,000 - 1,500 Lms  
**Available Kelvin:** 30K/35K/40K/50K  
**Options:** 120/277V



**BOLRDOPSM**

**Available Wattages:** 5W or 10W  
**Available Lumens:** 500 - 1,000 Lms  
**Available Kelvin:** 30K/35K/40K/50K  
**Options:** 120/277V, Dimming, Photocell



**BOLRS/BOLRR**

**Available Wattages:** 16W or 25W  
**Available Lumens:** 1,600 - 2,500 Lms  
**Available Kelvin:** 30K/40K/50K  
**Options:** Single/Double Fuse, Surge Protection, GFCI Receptacle, Microwave Sensor



**BOLSB/BOLSBH/BOLSBL**

**Available Wattages:** 5W - 15W  
**Available Lumens:** 500 - 1,500 Lms  
**Available Kelvin:** 30K/35K/40K/50K  
**Options:** Dimming, Photocell, Emergency Backup, (2) Heads at 180°



**BOLSBC**

**Available Wattages:** 16W  
**Available Lumens:** 2,265 Lms  
**Available Kelvin:** 30K/35K/40K/50K  
**Options:** Dimming, Photocell, Motion Sensing, Emergency Backup



**BOLSBC**

**Available Wattages:** 5W - 15W  
**Available Lumens:** 500 - 1,500 Lms  
**Available Kelvin:** 30K/40K/50K  
**Options:** Dimming, Photocell, (2) Heads at 180°



**BOLSBRD**

**Available Wattages:** 5W or 10W  
**Available Lumens:** 500 - 1,000 Lms  
**Available Kelvin:** 30K/35K/40K/50K  
**Options:** Dimming, Photocell, Emergency Backup, (2) Heads at 180°



**BOLSQFG**

**Available Wattages:** 20W  
**Available Lumens:** 2,000 Lms  
**Available Kelvin:** 30K/35K/40K/50K  
**Options:** Dimming, Photocell, Emergency Backup



**BOLSQFL**

**Available Wattages:** 20W  
**Available Lumens:** 2,000 Lms  
**Available Kelvin:** 30K/35K/40K/50K  
**Options:** Dimming, Photocell, Emergency Backup



**BOLSQFR**

**Available Wattages:** 20W  
**Available Lumens:** 2,000 Lms  
**Available Kelvin:** 30K/35K/40K/50K  
**Options:** Dimming, Photocell, Emergency Backup, GFCI Receptacle



**BOLSQOL**

**Available Wattages:** 20W or 40W  
**Available Lumens:** 2,000 - 4,000 Lms  
**Available Kelvin:** 30K/35K/40K/50K  
**Options:** Photocell, Emergency Backup




**BOLSQOLW**

**Available Wattages:** 10W - 40W  
**Available Lumens:** 1,080 - 4,000 Lms  
**Available Kelvin:** 30K/35K/40K/50K  
**Options:** Dimming, Photocell, 90°/180° House Side Shield, Emergency Backup



**BOLSQOP**

**Available Wattages:** 5W - 15W  
**Available Lumens:** 500 - 1,500 Lms  
**Available Kelvin:** 30K/40K/50K  
**Options:** Dimming, Photocell, Emergency Backup



**BOLSQOPXL**

Available Wattages: 15W  
Available Lumens: 1,500 Lms  
Available Kelvin: 30K/40K/50K  
Options: 120/277V, Dimming



**BOLSQR**

Available Wattages: 10W - 25W  
Available Lumens: 1,000 - 4,000 Lms  
Available Kelvin: 30K/35K/40K/50K  
Options: 120/277V, Emergency Backup



**BOLSWB**

Available Wattages: 5W  
Available Lumens: 500 Lms  
Available Kelvin: 30K/40K/50K  
Options: 120/277V, 180° Shield



**BOLVB**

Available Wattages: 15W  
Available Lumens: 1,500 Lms  
Available Kelvin: 30K/35K/40K/50K  
Options: 120/277V, Photocell



**BOLVWB-D**

Available Wattages: 15W  
Available Lumens: 1,500 Lms  
Available Kelvin: 30K/35K/40K/50K  
Options: 120/277V, Photocell



**BOLWB**

Available Wattages: 15W  
Available Lumens: 1,500 Lms  
Available Kelvin: 30K/35K/40K/50K  
Options: 120/277V, Dimming, Photocell, Emergency Backup



**BOLWM**

Available Wattages: 10W or 15W  
Available Lumens: 1,000 - 1,500 Lms  
Available Kelvin: 30K/35K/40K/50K  
Options: 120/277V, Dimming, Photocell, Emergency Backup



**BOLWSLT**

Available Wattages: 6W  
Available Lumens: 600 Lms  
Available Kelvin: 30K/35K/40K/50K  
Options: 4 Lights, 2 Lights, 1 Light, Low Voltage



**BOPL**

Available Wattages: 10W - 25W  
Available Lumens: 1,000 - 4,000 Lms  
Available Kelvin: 30K/35K/40K/50K  
Options: 120/277V, Dimming, Photocell, Direct Burial Extension, (2) Heads at 180°



**BOPLOF**

**Available Wattages:** 10W  
**Available Lumens:** 1,000 Lms  
**Available Kelvin:** 30K/40K/50K  
**Options:** 120/277V



**BOSOL**

**Available Wattages:** 10W - 20W  
**Available Lumens:** 1,000 - 2,000 Lms  
**Available Kelvin:** 30K/35K/40K/50K  
**Options:** Dimming, Photocell, Emergency Backup



**BOSQ**

**Available Wattages:** 40W  
**Available Lumens:** 4,000 Lms  
**Available Kelvin:** 30K/35K/40K/50K  
**Options:** Dimming, Emergency Backup



**BOSQAT**

**Available Wattages:** 15W or 40W  
**Available Lumens:** 1,500 - 4,000 Lms  
**Available Kelvin:** 30K/35K/40K/50K  
**Options:** Dimming, Photocell, Emergency Backup, 1 Side Light/2 Side Light



**CAST**

**Available Wattages:** 10W - 25W  
**Available Lumens:** 1,000 - 4,000 Lms  
**Available Kelvin:** 30K/40K  
**Options:** Photocell, House Side Shield, Emergency Backup



**DBL003**

**Available Wattages:** 15W  
**Available Lumens:** 1,500 Lms  
**Available Kelvin:** 30K/35K/40K/50K  
**Options:** 120/277V, Dimming, Photocell, Direct Bury, Emergency Backup



**DBL060A**

**Available Wattages:** 10W - 20W  
**Available Lumens:** 600 - 1,200 Lms  
**Available Kelvin:** 30K/35K/40K  
**Options:** 120/277V, Dimming, Photocell, Direct Bury, Emergency Backup



**DBOLC**

**Available Wattages:** 5W - 20W  
**Available Lumens:** 500 - 2,000 Lms  
**Available Kelvin:** 30K/35K/40K/50K  
**Options:** 120/277V, Dimming, Photocell, Direct Bury, Emergency Backup



**DBOLSL**

**Available Wattages:** 5W - 20W  
**Available Lumens:** 500 - 2,000 Lms  
**Available Kelvin:** 30K/35K/40K/50K  
**Options:** 120/277V, Dimming, Photocell, Emergency Backup



### DBOLSQ

**Available Wattages:** 5W - 20W  
**Available Lumens:** 500 - 2,000 Lms  
**Available Kelvin:** 30K/35K/40K/50K  
**Options:** Dimming, Photocell, 90°/180°  
House Side Shield, Emergency Backup




### DBOLWB

**Available Wattages:** 20W  
**Available Lumens:** 2,000 Lms  
**Available Kelvin:** 30K/40K/50K  
**Options:** Dimming



### DBOLXSL

**Available Wattages:** 5W  
**Available Lumens:** 500 Lms  
**Available Kelvin:** 30K/40K/50K  
**Options:** 120/277V, Dimming

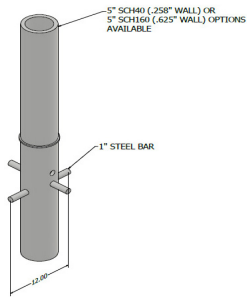

### STOP-DB

.258" or .625" Wall Thickness  
48" OAH  
Custom Dimensions Available



---

# POLELIGHTS

**DPL465/DPL46S**

**Available Wattages:** 10W - 80W  
**Available Lumens:** 2,000 - 12,000 Lms  
**Available Kelvin:** 30K/40K/50K  
**Options:** Dimming, Photocell, Motion Sensing



**DPL38**

**Available Wattages:** 25W - 120W  
**Available Lumens:** 6,000 - 20,000 Lms  
**Available Kelvin:** 30K/35K/40K/50K  
**Options:** (1) Head at 90°, (2) Heads at 90°, (2) Head at 180°



**DPL043**

**Available Wattages:** 20W - 96W  
**Available Lumens:** 2,000 - 15,000 Lms  
**Available Kelvin:** 30K/35K/40K/50K  
**Options:** Dimming



**DPLDIAG**

**Available Wattages:** 20W - 96W  
**Available Lumens:** 2,000 - 15,000 Lms  
**Available Kelvin:** 30K/35K/40K/50K  
**Options:** Dimming, Emergency Backup, 180° House Side Shield



### DPLSQLW

**Available Wattages:** 20W - 60W  
**Available Lumens:** 2,000 - 6,000 Lms  
**Available Kelvin:** 30K/35K/40K/50K  
**Options:** Dimming, 90°/180° Shield,  
Emergency Backup



### PLSQBLT

**Available Wattages:** 15W - 40W  
**Available Lumens:** 1,380 - 4,400 Lms  
**Available Kelvin:** 30K/35K/40K/50K  
**Options:** (4) Front Lights, (2) Side Lights/(2)  
Front Lights, (2) Side Lights/(1) Front Lights,  
(3) Side Lights



### PLSQOP

**Available Wattages:** 25W or 65W  
**Available Lumens:** 3,400 - 5,050 Lms  
**Available Kelvin:** 30K/40K/50K  
**Options:** Dimming, Emergency Backup



---

WALL SCONCES

**DNW SERIES**  
**Available Wattages:** 10W - 60W  
**Available Lumens:** 1,000 - 9,000 Lms  
**Available Kelvin:** 30K/35K/40K/50K  
**Options:** 120/277V, Dimming, Emergency Backup, Mid-Mount



**1413/2413**  
**Available Wattages:** 12W or 20W  
**Available Lumens:** 1,200 - 2,000 Lms  
**Available Kelvin:** 30K/35K/40K/50K  
**Options:** 120/277V, Photocell, Dark Sky, Emergency Backup



**AES**  
 GU10 Socket  
**Options:** Photocell, Emergency Backup



**AURORA**  
**Available Wattages:** 12W - 36W  
**Available Lumens:** 1,200 - 3,600 Lms  
**Available Kelvin:** 30K/35K/40K/50K  
**Options:** 120/277V, Dimming, Emergency Backup



**CAMBRIDGE**

**Available Wattages:** 12W or 21W  
**Available Lumens:** 1,200 - 2,100 Lms  
**Available Kelvin:** 30K/35K/40K/50K  
**Options:** 120/277V, Dimming, Emergency Backup, Metal Top/Bottom



**CUD9**

(2) G9 Sockets  
**Options:** N/A



**DNWSQ**

**Available Wattages:** 5W - 15W  
**Available Lumens:** 500 - 1,500 Lms  
**Available Kelvin:** 30K/35K/40K/50K  
**Options:** 120/277V, Dimming, Emergency Backup



**DWM46S**

**Available Wattages:** 22W or 40W  
**Available Lumens:** 2,500 - 5,000 Lms  
**Available Kelvin:** 30K/40K/50K  
**Options:** Dimming, Photocell, Emergency Backup, Motion Sensing



**EDGE**

**Available Wattages:** 10W or 22W  
**Available Lumens:** 1,000 - 2,200 Lms  
**Available Kelvin:** 30K/35K/40K/50K  
**Options:** 120/277V, Dimming



**ELPASO**

**Available Wattages:** 10W - 40W  
**Available Lumens:** 1,250 - 4,650 Lms  
**Available Kelvin:** 30K/35K/40K/50K  
**Options:** 120/277V, Dimming, Photocell, Emergency Backup, Metal Top/Bottom



**FPRUD**

**Available Wattages:** 10W  
**Available Lumens:** 1,000 Lms  
**Available Kelvin:** 30K/35K/40K/50K  
**Options:** 120/277V, Dimming



**GFS SERIES**

Single Incandescent Socket  
**Available Kelvin:** 27K  
**Options:** N/A



**LOWL**

**Available Wattages:** 40W or 78W  
**Available Lumens:** 4,000 - 7,800 Lms  
**Available Kelvin:** 30K/35K/40K/50K  
**Options:** Cord/Pendant/AC Cable Mount



**L SERIES**

Available Wattages: 21W - 64W  
Available Lumens: 2,100 - 6,400 Lms  
Available Kelvin: 30K/40K/50K  
Options: 120/277V, Dimming, Emergency Backup



**MFSL**

Available Wattages: 5W  
Available Lumens: 1,600 Lms  
Available Kelvin: 30K/40K/50K  
Options: 120/277V, Dimming, Photocell




**P824**

Available Wattages: Dual 15W (Up/Down)  
Available Lumens: 1,500 Lms  
Available Kelvin: 30K/35K/40K/50K  
Options: 120/277V, Dimming, Photocell



**RDL/SQDL**

Available Wattages: 5W - 21W  
Available Lumens: 500 - 2,100 Lms  
Available Kelvin: 30K/35K/40K/50K  
Options: 120/277V, Dimming, Emergency Backup



**RDSL**

Available Wattages: 5W  
Available Lumens: 500 Lms  
Available Kelvin: 30K/35K/40K/50K  
Options: 120/277V, Dimming, Emergency Backup



**RDLSLL**

Available Wattages: 12W  
Available Lumens: 1,200 Lms  
Available Kelvin: 30K/35K/40K/50K  
Options: 120/277V, Dimming



**RECBX**

Available Wattages: 10W  
Available Lumens: 1,200 Lms  
Available Kelvin: 30K/40K/50K  
Options: 120/277V, Dimming, Wet Listed, ADA Compliant



**RUDL**

Available Wattages: 10W - 20W  
Available Lumens: 1,000 - 2,000 Lms  
Available Kelvin: 30K/35K/40K/50K  
Options: 120/277V, Dimming, Emergency Backup



**S SERIES**

Available Wattages: 12W - 36W  
Available Lumens: 1,200 - 3,600 Lms  
Available Kelvin: 30K/35K/40K/50K  
Options: 120/277V, Dimming, Photocell, Emergency Backup, Metal Top/Bottom



**SOLAWM**

Available Wattages: 40W - 70W  
Available Lumens: 4,000 - 7,000 Lms  
Available Kelvin: 30K/40K/50K  
Options: 90°/180° Shield, Type III/V Reflector



**SOLJA**

Available Wattages: 20W - 55W  
Available Lumens: 2,000 - 5,500 Lms  
Available Kelvin: 30K/35K/40K/50K  
Options: N/A



**SQDP**

Available Wattages: 10W  
Available Lumens: 1,000 Lms  
Available Kelvin: 30K/35K/40K/50K  
Options: 120/277V, Dimming



**SQSF12**

Available Wattages: 20W  
Available Lumens: 2,000 Lms  
Available Kelvin: 30K/35K/40K/50K  
Options: 120/277V, Dimming



**SQUDL**

Available Wattages: 10W or 12W  
Available Lumens: 1,000 - 1,200 Lms  
Available Kelvin: 30K/35K/40K/50K  
Options: 120/277V, Dimming



**STYNE**

Available Wattages: 10W - 16W  
Available Lumens: 1,000 - 1,600 Lms  
Available Kelvin: 30K/35K/40K/50K  
Options: 120/277V, Dimming



**SUNDANCE**

Available Wattages: 5W - 36W  
Available Lumens: 500 - 3,600 Lms  
Available Kelvin: 30K/35K/40K/50K  
Options: 120/277V, Dimming, Emergency Backup, Metal Top/Bottom




**TPS**

Available Wattages: 22W  
Available Lumens: 2,500 Lms  
Available Kelvin: 30K/40K/50K  
Options: Dimming



**TWS**

Available Wattages: 35W  
Available Lumens: 3,500 Lms  
Available Kelvin: 30K/35K/40K  
Options: 120/277V, Dimming, Photocell, Emergency Backup, ADA Complaint, Lens Top/Bottom



**TWSSW**

**Available Wattages:** 35W  
**Available Lumens:** 3,500 Lms  
**Available Kelvin:** 30K/35K/40K  
**Options:** 120/277V, Dimming, Photocell, Emergency Backup, Lens Top/Bottom



**UD SERIES**

**Available Wattages:** 10W - 90W  
**Available Lumens:** 1,000 - 11,600 Lms  
**Available Kelvin:** 30K/40K/50K  
**Options:** 120/277V, Dimming, Photocell, Wet Listed, ADA Compliant, Lens Top/Bottom



**UDRT612**

**Available Wattages:** 28W  
**Available Lumens:** 2,800 Lms  
**Available Kelvin:** 30K/35K/40K  
**Options:** N/A



**UDSQ**

**Available Wattages:** 10W - 30W  
**Available Lumens:** 1,000 - 3,000 Lms  
**Available Kelvin:** 30K/35K/40K/50K  
**Options:** 120/277V, Dimming, ADA Compliant



**UPW**

**Available Wattages:** 10W - 45W  
**Available Lumens:** 1,000 - 5,800 Lms  
**Available Kelvin:** 30K/35K/40K/50K  
**Options:** 120/277V, Dimming, Narrow Throw, Emergency Backup



**WBS SERIES**

**Available Wattages:** 12W - 52W  
**Available Lumens:** 1,200 - 5,200 Lms  
**Available Kelvin:** 30K/35K/40K/50K  
**Options:** 120/277V, Dimming, Lens Top/Bottom, Emergency Backup



**ZEPLYN - WALL MOUNT**

**Available Wattages:** 16W  
**Available Lumens:** 1,600 Lms  
**Available Kelvin:** 30K/35K/40K/50K  
**Options:** Emergency Backup



---

# WALLPACKS

**MWPCSL**

**Available Wattages:** 26W - 135W  
**Available Lumens:** 3,800 - 19,000 Lms  
**Available Kelvin:** 30K/40K/50K  
**Options:** Dimming, Emergency Backup,  
Photocell



**CWPSL**

**Available Wattages:** 24W  
**Available Lumens:** 3,500 Lms  
**Available Kelvin:** 30K/40K/50K  
**Options:** Photocell, Emergency Backup



**DWP009L**

**Available Wattages:** 13W - 42W  
**Available Lumens:** 1,500 - 4,200 Lms  
**Available Kelvin:** 30K/40K/50K  
**Options:** Dimming, Photocell, Emergency Backup



**DWPCS**

**Available Wattages:** 30W - 80W  
**Available Lumens:** 3,000 - 8,000 Lms  
**Available Kelvin:** 30K/40K/50K  
**Options:** Photocell, Motion Sensing,  
Emergency Backup



**LWPM**

**Available Wattages:** 90W or 135W  
**Available Lumens:** 9,900 - 15,100 Lms  
**Available Kelvin:** 40K/50K  
**Options:** Dimming, Photocell, Emergency Backup



**MWPC**

**Available Wattages:** 50W - 120W  
**Available Lumens:** 5,000 - 12,100 Lms  
**Available Kelvin:** 30K/40K  
**Options:** Photocell, Emergency Backup



**MWPCLA**

**Available Wattages:** 25/40/60/80W (CCT)  
**Available Kelvin:** 30K/40K/50K (CCT)  
**Options:** Photocell



**MWPL/LWPL**

**Available Wattages:** 50W - 120W  
**Available Lumens:** 5,000 - 12,100 Lms  
**Available Kelvin:** 40K/50K  
**Options:** Photocell



**MWP/SWP**

**Available Wattages:** 10W - 40W  
**Available Lumens:** 1,000 - 4,000 Lms  
**Available Kelvin:** 30K/35K/40K/50K  
**Options:** Dimming, Photocell, Emergency Backup



**MWPC/SWPC**

**Available Wattages:** 10W - 40W  
**Available Lumens:** 1,000 - 4,000 Lms  
**Available Kelvin:** 30K/35K/40K/50K  
**Options:** Dimming, Photocell, Emergency Backup



**WCUD/WCDN**

**Available Wattages:** 20W or 40W  
**Available Lumens:** 2,000 - 4,000 Lms  
**Available Kelvin:** 41K  
**Options:** Photocell, Emergency Backup



**WP35/WP36**

**Available Wattages:** 25W - 45W  
**Available Lumens:** 2,500 - 4,500 Lms  
**Available Kelvin:** 30K/40K/50K  
**Options:** 120/277V, Dimming, Photocell, Emergency Backup, Motion Sensing



**WP303**

**Available Wattages:** 12W - 40W  
**Available Lumens:** 1,200 - 4,000 Lms  
**Available Kelvin:** 30K/40K/50K  
**Options:** 120/277V, Dimming, Photocell, Emergency Backup, Motion Sensing



### WPST

**Available Wattages:** 30W - 100W  
**Available Lumens:** 3,000 - 10,000 Lms  
**Available Kelvin:** 30K/40K/50K  
**Options:** Photocell



### WPWL

**Available Wattages:** 60W or 80W  
**Available Lumens:** 6,000 - 8,000 Lms  
**Available Kelvin:** 41K  
**Options:** Photocell, Knuckle, Slip Fitter




---

# CUSTOM CREATIONS

**CBXBX**  
Single Incandescent Socket  
Options: N/A



**CATC**  
Contact for Details

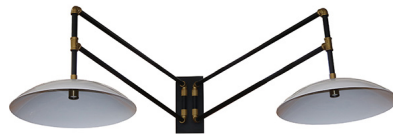

**DSAS225**  
(2) Incandescent Sockets  
Options: N/A



**HAYSTACK**  
Available Wattages: 20W  
Available Lumens: 2,000 Lms  
Available Kelvin: 30K/35K/40K/50K  
Mount: AC Cable Mount



**HEL**

**Available Wattages:** 4.2W (Per Foot)  
**Available Lumens:** 350 Lms  
**Available Kelvin:** 30K/40K  
**Mount:** Pendant/AC Cable Mount



**HELLO**

Contact for Details




**HELXX**

**Available Wattages:** 4.2W (Per Foot)  
**Available Lumens:** 350 Lms  
**Available Kelvin:** 30K/40K  
**Mount:** Pendant/AC Cable Mount



**HEX**

Contact for Details

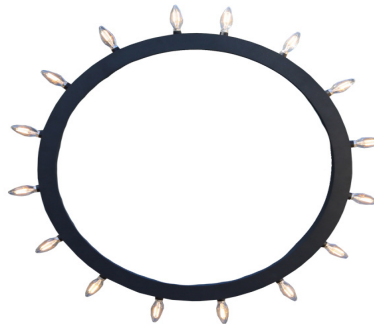

**HOOP**

**Available Wattages:** 5W  
**Available Kelvin:** 30K/40K  
**Options:** N/A



**LUNA**

Artistic & Architectural Custom Pendant Lighting Solution. Comprised of Shades at Varying Suspension Heights with Dark Exterior and Gold Interior. Contact For More Details.



**ODCR**

Incandescent Socket  
**Mount:** Chain/Pendant Mount



**TURBINE**

(10) GU24 Sockets  
**Available Kelvin:** 27K/35K/41K  
**Options:** Wet Listed  
**Mount:** Pendant Drop 64"



**WAVE**

Contact for Details



---

(936) 494-3900

3704 Hilltop Dr., Suite 200  
Conroe, TX 77303