



**PERFORMANCE**

**Delivered Lumens:**  
4,760 – 11,124 lumens (Depending on Configuration)

**Wattage:**  
28W – 70W LED System

**Efficacy:**  
Up to 160 lm/W (projected efficacy based on LED manufacturer data)

**LED Lumen Maintenance:**  
L70 ≥ 50,000 hours

**Typical Application Life:**  
Projected LED life exceeds 50,000 hours under 25°C ambient operating conditions.

**Color Characteristics:**  
CCT: 3000K / 4000K / 5000K  
CRI: ≥80 standard

**Distribution Types:**  
Type III / Type IV / Type V

**Thermal Management:**  
Engineered heat dissipation system designed to maintain LED operating temperature for long-term lumen maintenance and system reliability.

**ELECTRICAL**

**Input Voltage:**  
120/277V

**Dimming:**  
0–10V (DIM Option)

**Driver:**  
Programmable LED Driver  
Power Factor >0.92  
Total Harmonic Distortion (THD) <20%  
Driver Efficacy ≥89%

**LEDs:**  
High-efficacy LEDs mounted to metal-core circuit boards for optimized thermal management.

**CONSTRUCTION**

**Housing:**  
Die-cast aluminum housing  
\*All aluminum components are manufactured from corrosion-resistant alloys suitable for outdoor architectural environments.

**Finish:**  
Corrosion-resistant Super Durable Powder Coat Finish

**Optics:**  
Clear Polycarbonate Lens

**LED Source:**  
Integrated LED Array



**INSTALLATION**

Installation by qualified electrician.


**LISTINGS**

UL Listed for Wet Locations.  
Conforms to UL 1598 and CSA standards.

**WARRANTY**

Standard 2-Year Limited Warranty  
Optional 5-Year and 7-Year Extended Warranties Available  
Rated for -22°F - 113°F ambient operating temperature.

Note: Specifications subject to change without notice. Actual performance may vary depending on installation environment and operating conditions.

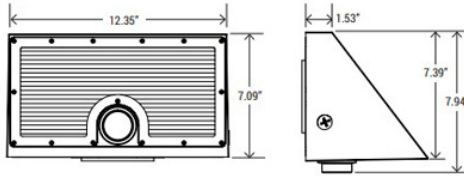

**SPECIFICATIONS**

Width: 12.35"  
Height: 7.09"  
Weight: 8.14 lbs.

**ORDERING GUIDE**

MODEL	FINISH	PERFORMANCE	KELVIN	TYPE	OPTIONS
<b>Model</b> AWP	<b>Finish</b> DB - Dark Bronze BL - Black AS - Anodized Silver WH - White CC - Custom Color	<b>Performance</b> LED24 - 24W LED 4760 Lms LED42 - 42W LED 6880 Lms LED56 - 56W LED 8601 Lms LED70 - 70W LED 11124 Lms	<b>Kelvin</b> 30 - 30K 40 - 40K 50 - 50K	<b>Type</b> III - Type III IV - Type IV (Standard) V - Type V	<b>Options</b> 5Y - 5 Year Warranty 7Y - 7 Year Warranty DIM - 0-10V Dimmable BT - Wireless Bluetooth System PC - Photocell MOT - Motion Sensor EM8 - 800 Lumens Emergency EM15 - 1500 Lumens Emergency EM20 - 2000 Lumens Emergency