

Decorative Pole w/ Bell Bottom Base



Decorative Aluminum Pole For Area & Site Lighting Applications

CONSTRUCTION

Pole Shaft:
Extruded Aluminum Shaft

Hand Hole:
N/A

Base:
Cast Aluminum Base

Anchor Bolts:
(4) Hot dip galvanized steel bolts conforming to ASTM F1554 Grade 55 requirements with a minimum yield strength of 55,000 psi are provided. Bolts are 1/2" x 12" long for poles up to 25' or 30" long for poles greater than 25'. (2) washers and (2) nuts are provided per bolt.

Finishes:
All fixtures are phosphate pre-treated for corrosion resistance and superior bonding, then finished in a TGIC polyester weather resistant powder coated finish. All finishes are applied directly in-house in our state-of-the-art, purpose-built spray booths. Standard finishes are finely textured and available in Dark Bronze, Black, Anodized Silver, and White colors. Custom colors and finishes available upon request. Faux Wood Grain Finish Option Available. Optional primer coat available for extended protection.



1/2 x 12"

INSTALLATION

Installation by qualified electrician.



WARRANTY

Standard Warranty:
2-Year Limited Warranty covering defects in materials and workmanship.

Extended Warranty Options:
5-Year and 7-Year extended warranty programs available for increased long-term coverage (Finish Only).

DIMENSIONS

5" Shaft
Base Measures 16.49" Dia. x 19.55"H

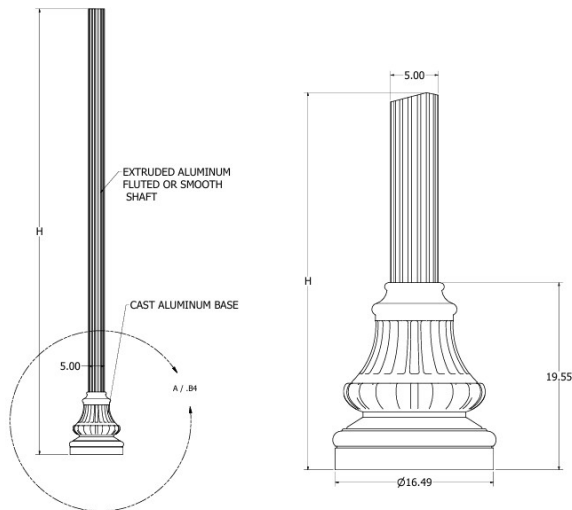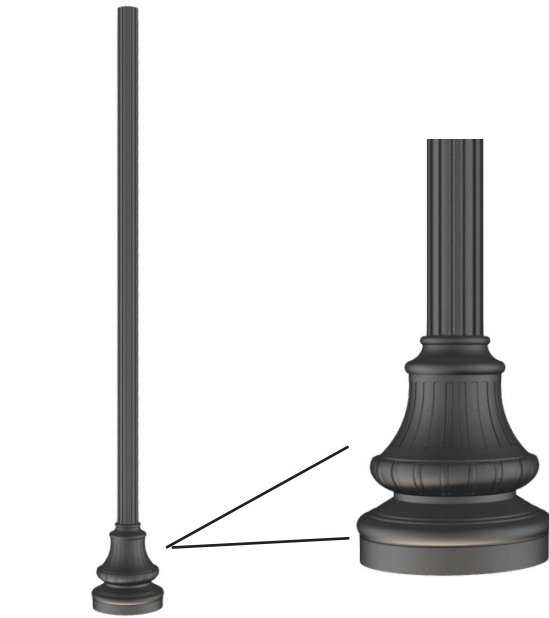

ORDERING GUIDE

MODEL	SHAFT	SHAFT SHAPE	HEIGHT	OPTIONS	PRIMER	FINISH
Model POLE-DECO-BELL (Round Decorative Anchor Plate Pole w/ Bell Bottom Base)	Shaft 5 - 5" RD	Shaft Shape FL - Fluted SM - Smooth	Height 8' 10' 12' 15' 18' Max Height of 18'	Options TENON 2 3/8 x 3 TENON 3x3	Primer(Optional) P - Primer Coat (Recommended for Coastal Environments)	Finish DB - Dark Bronze BL - Black AS - Anodized Silver WH - White CC - Custom Color

**Customer is responsible for providing fully dimensioned drill patterns when using heads from other manufacturers; otherwise, the standard Divine Lighting drill pattern will be used.

**Customer must specify the orientation of fixtures on the pole when ordering. This information can be found in the options section, e.g. 190, 2180, etc.

**Divine Lighting is not responsible for inconsistencies between poles, fixtures, and parts produced by different manufacturers, and cannot guarantee proper fitting between such components.