

Standard Product Specifications

Pole Shaft:

Fabricated from domestic ASTM A500 Grade C steel tubing, minimum yield strength 50,000 psi.

Base Plate:

ASTM A36 structural steel with 36,000 psi minimum yield. Two piece base cover and hardware included.

Anchor Bolts:

(4) Galvanized steel per ASTM F1554 Grade 55 with (2) nuts and (2) washers per bolt.

Hand Hole:

3x5 in.(4sq+4rd+) or 2x4 (3rd) reinforced opening 12 in. above base; includes cover and stainless-steel screws.

Finish:

Durable powder coat with phosphate pre-treatment for corrosion resistance.

Optional primer undercoat available for extended protection.

Warranty:

2 Year Structural Warranty

1-Year Limited Finish Warranty Standard;

3-Year Optional Warranty

(Extended warranty options apply to finish only).

Grounding:

Grounding hole provided inside hand hole.

Mount w/ 1/2" NPT

Drilled to Accommodate 1/2" Couplers with 12" of Spacing - See Following Pages for Configuration Options




3/4x18"

MODEL	CONFIGURATION	NUMBER OF ROWS	HEIGHT	FINISH
<u>Model</u> CPL	<u>Configuration</u> 190 2180 3120 490 SPRL	<u>Number of Rows</u> 1 2 3 4 XX - Custom	<u>Height</u> XX - Height of Pole in Feet	<u>Finish</u> DB - Dark Bronze BL - Black AS - Anodized Silver WH - White CC - Custom Color



Customer is responsible for providing **fully dimensioned drill patterns when using heads from other manufacturers; otherwise, the standard Divine Lighting drill pattern will be used.

Customer must **specify the orientation of fixtures on the pole when ordering. This information can be found in the options section, e.g. **190, 2180, etc.**


**Divine Lighting is not responsible for inconsistencies between poles, fixtures, and parts produced by different manufacturers, and cannot guarantee proper fitting between such components.

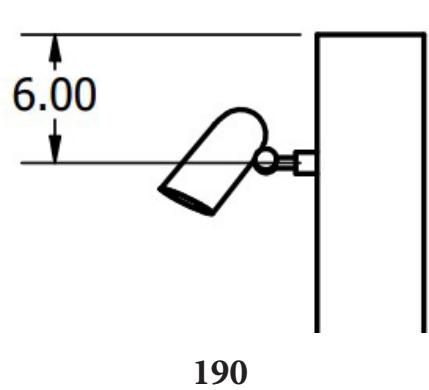



190

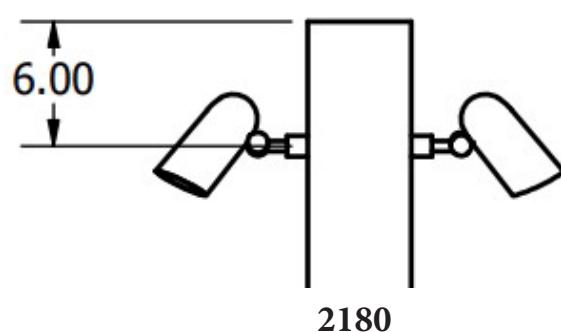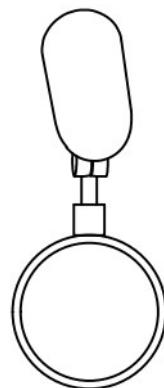


2180

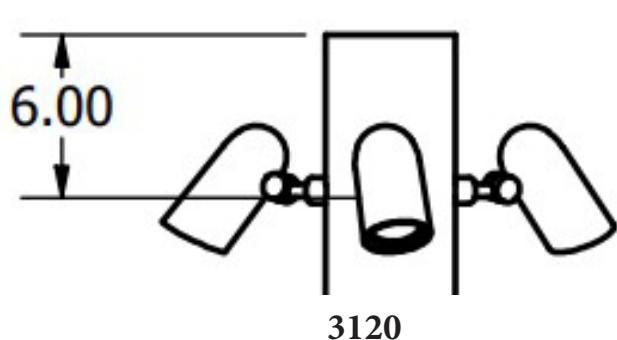


3120

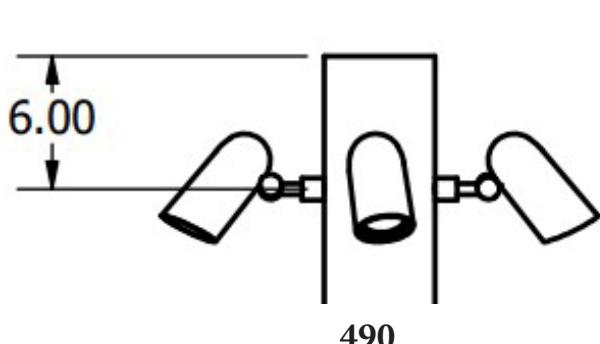

490



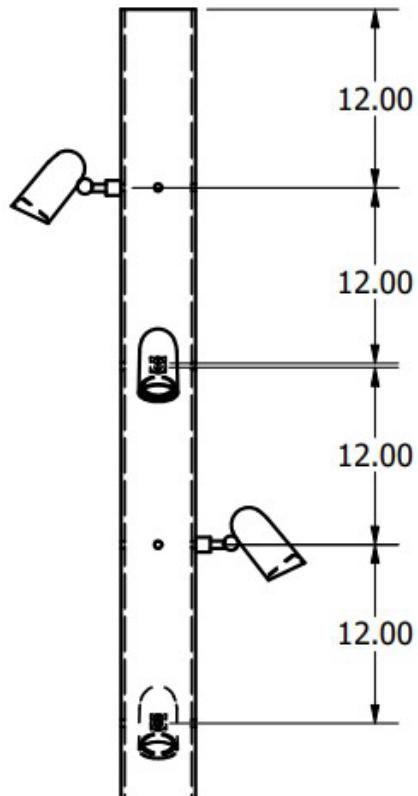

SPRL

