


DIRECT BURY SQUARE ALUMINUM POLE SERIES

The Chart Below is a Guideline -
Consult With an Engineer for Site Specific Requirements.

Direct Bury Guideline Chart

OVH Length	AFG Height	Bury Depth
10'	8'	2'
12'	10'	2'
14'	12'	2'
18'	15'	3'
21'	18'	3'
24'	20'	4'
30'	25'	5'

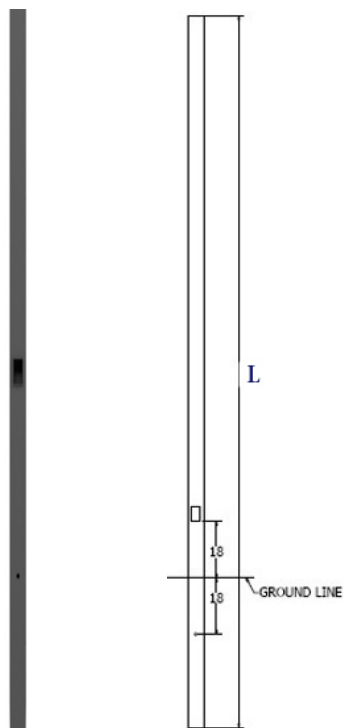

SPECIFICATIONS

L = Overall Length



Now Available With Faux Wood Grain Finish



CONSTRUCTION

Designed, Engineered, and Manufactured in Texas
Meets BAA & BABA Standards

Pole Shaft:

Pole shaft is fabricated from **seamless extruded 6063-T6 aluminum alloy** and designed for decorative area and site lighting applications. All welds are ground smooth and blended to provide a clean architectural appearance. **All exposed hardware shall be stainless steel.**

Hand Hole:

0.875" Access hole located approximately 18" below grade

Grounding:

Grounding lug provided inside hand hole for field grounding connection. Grounding conductor and hardware by others.

Finishes:

All aluminum components receive a multi-stage chemical pretreatment process for enhanced corrosion resistance and coating adhesion, followed by a durable TGIC polyester powder coat finish. Finishes are applied in-house utilizing state-of-the-art powder coating equipment. Standard colors include Dark Bronze, Black, Anodized Silver, and White. Custom colors and finishes are available upon request. Faux Wood Grain Finish Option Available. Optional primer coat available for extreme environmental conditions.

INSTALLATION

Installation by qualified electrician.

WARRANTY

Standard Warranty:

2-Year Limited Warranty covering defects in materials and workmanship.

Extended Warranty Options:

5-Year and 7-Year extended warranty programs available for increased long-term coverage (Finish Only).

ORDERING GUIDE

MODEL	SHAFT	WALL THICKNESS	OVERALL LENGTH	BURY DEPTH	OPTIONS	PRIMER	FINISH
Model POLE-DB-SAP (Square Aluminum Direct Bury)	Shaft 4 - 4" SQ 5 - 5" SQ 6 - 6" SQ	Wall Thickness .188 - .188 Wall .25 - .25 Wall	Overall Length 10' 12' 15' 18' 20' 25' 30'	Bury Depth BX - Custom Bury Depth (In Feet)	Options 190 - (1) 90 Degree Hole 2180 - (2) 180 Degree Holes GFCI - GFCI Receptacle GFCILOCK - GFCI Lock TENON 2 3/8 x 3 EYE - Eye Hooks	Primer(Optional) P - Primer Coat (Recommended for Coastal Environments)	Finish DB - Dark Bronze BL - Black AS - Anodized Silver WH - White CC - Custom Color WGF - Faux Wood Grain Finish

Customer is responsible for providing **fully dimensioned drill patterns when using heads from other manufacturers; otherwise, the standard Divine Lighting drill pattern will be used.

Customer must **specify the orientation of fixtures on the pole when ordering. This information can be found in the options section, e.g. 190, 2180, etc.

**Divine Lighting is not responsible for inconsistencies between poles, fixtures, and parts produced by different manufacturers, and cannot guarantee proper fitting between such components.