




14W

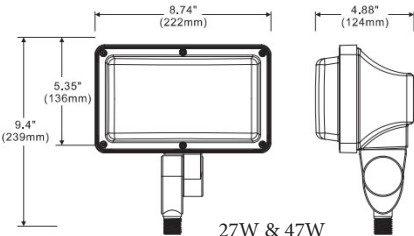

27W & 47W

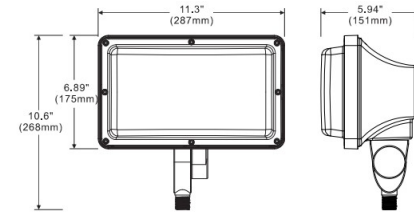

72W & 96W

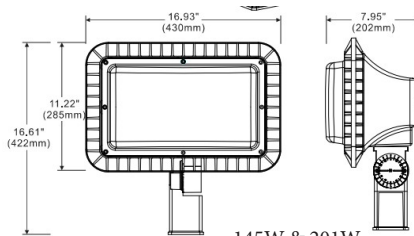

145W & 201W

PERFORMANCE

Delivered Lumens:
1,800 – 28,000 lumens (Depending on Configuration)
Wattage:
14W – 201W LED System
Efficacy:
Up to 141 lm/W (projected efficacy based on LED manufacturer data)
Typical Application Life:
Projected LED life exceeds 100,000 hours under 25°C ambient operating conditions.
Color Characteristics:
CCT: 3000K / 4000K / 5000K (CCT Selectable)
CRI: ≥80 standard
Thermal Management:
Engineered heat dissipation system designed to maintain LED operating temperature for long-term lumen maintenance and system reliability.

ELECTRICAL

Input Voltage:
120/277V
Dimming:
0–10V (DIM Option)
Driver:
Programmable LED Driver
Power Factor >0.92
Total Harmonic Distortion (THD) <20%
LEDs:
High-efficacy LEDs mounted to metal-core circuit boards for optimized thermal management.

CONSTRUCTION

Housing:
Die-Cast Aluminum Heatsink and Extruded Aluminum Body.
*All aluminum components are manufactured from corrosion-resistant alloys suitable for outdoor architectural environments.
*Designed and manufactured in the USA.
Finish:
Corrosion-resistant Super Durable Powder Coat Finish
Optics:
Diffused Polycarbonate Lens
LED Source:
Integrated LED Array

INSTALLATION

Installation by qualified electrician.

LISTINGS

UL Listed
Conforms to UL 1598 and CSA standards.

WARRANTY

Standard 2-Year Limited Warranty
Optional 5-Year and 7-Year Extended Warranties Available
Rated for 40°C maximum ambient operating temperature.

Note: Specifications subject to change without notice. Actual performance may vary depending on installation environment and operating conditions.

ORDERING GUIDE

MODEL	FINISH	PERFORMANCE	KELVIN	OPTIONS
		*Shown at 4000K		
Model FLG	Finish DB - Dark Bronze BL - Black AS - Anodized Silver WH - White CC - Custom Color	Performance LED14 - 14W LED 1866 Lms LED27 - 27W LED 3677 Lms LED47 - 47W LED 6601 Lms LED72 - 72W LED 9654 Lms LED96 - 96W LED 13479 Lms LED145 - 145W LED 20082 Lms LED201 - 201W LED 27867 Lms	Kelvin 30 - 30K 40 - 40K 50 - 50K	Options 5Y - 5 Year Warranty 7Y - 7 Year Warranty DIM - 0-10V Dimmable PC - Photocell