

Standard Product Specifications

Materials:

Die-Cast Aluminum Housing

Finish:

Powder Coated

Lens:

Frosted Polycarbonate

LED:

Integrated LED Array

Listing:

Wet List to Meet UL 1598 Standard

Driver Info:

120/277V

Installation Information:

Install by Qualified Electrician


Warranty:

2 Years From Date of Shipment

DIMENSIONS:

9.2"L x 9.2"W x 3.3"D (Without EM)

9.2"L x 9.2"W x 4.8"D (With EM)

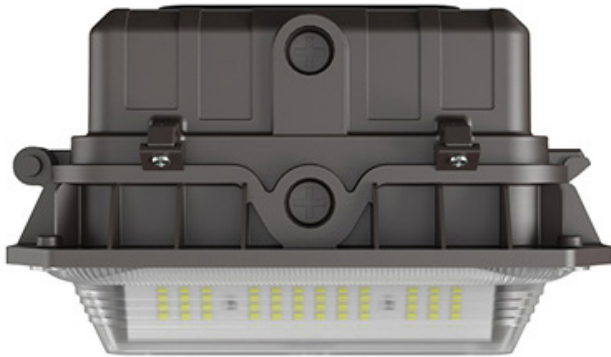

*Shown in 40K



MODEL	FINISH	WATTAGE	KELVIN	OPTIONS
<u>Model</u> GSQ9	<u>Finish</u> DB - Dark Bronze BL - Black WH - White	<u>Wattage</u> LED40 LED45 LED60 LED65 LED70 See Next Page for Wattage and Lumen Specifications	<u>Kelvin(CCT Adjustable)</u> 30 - 30K 40 - 40K 50 - 50K	<u>Options</u> EM8 - 900 lms Emergency Backup MOT - Motion Sensing

Lumen Chart - LED40	System Watts	3000K	4000K	5000K
	40W	5900lm	6200lm	6000lm
	32W	4900lm	5100lm	5000lm
	24W	3800lm	3900lm	3800lm
	16W	2600lm	2700lm	2600lm

Lumen Chart - LED45	System Watts	3000K	4000K	5000K
	45W	5900lm	6200lm	6000lm
	36W	4900lm	5100lm	5000lm
	27W	3800lm	4000lm	3800lm
	18W	2600lm	2700lm	2600lm

Lumen Chart - LED60	System Watts	3000K	4000K	5000K
	60W	8900lm	9400lm	9000lm
	48W	7400lm	7900lm	7500lm
	36W	5700lm	6100lm	5800lm
	24W	3900lm	4100lm	3900lm

Lumen Chart - LED65	System Watts	3000K	4000K	5000K
	65W	8900lm	9400lm	9000lm
	52W	7300lm	7800lm	7400lm
	39W	5700lm	6000lm	5700lm
	26W	3900lm	4100lm	3900lm

Lumen Chart - LED70	System Watts	3000K	4000K	5000K
	70W	9900lm	10500lm	10000lm
	56W	8200lm	8700lm	8300lm
	42W	6300lm	6700lm	6400lm
	28W	4300lm	4600lm	4400lm