

**CONSTRUCTION**

**Designed, Engineered, and Manufactured in Texas
Meets BAA & BABA Standards**

Pole Shaft:

Pole shaft is fabricated from **seamless extruded 6063-T6 aluminum alloy** and designed for decorative area and site lighting applications.

Hand Hole:

0.875" Access hole located approximately 18" below grade

Base:

Manufactured from 6061 aluminum alloy plate, providing superior structural integrity and corrosion resistance.

Anchor Bolts:

(4) Hot-dip galvanized steel anchor bolts conforming to ASTM F1554 Grade 55 requirements with a minimum yield strength of 55,000 psi are provided. Bolts are ¾"-10 x 18" long for poles up to 25' mounting height, or 30" long for poles greater than 25'. (2) washers and (2) nuts are provided per bolt.

Grounding:

Grounding lug provided inside hand hole for field grounding connection. Grounding conductor and hardware by others.

Finishes:

All aluminum components receive a multi-stage chemical pretreatment process for enhanced corrosion resistance and coating adhesion, followed by a durable TGIC polyester powder coat finish. Finishes are applied in-house utilizing state-of-the-art powder coating equipment. Standard colors include Dark Bronze, Black, Anodized Silver, and White. Custom colors and finishes are available upon request. Faux Wood Grain Finish Option Available. Optional primer coat available for extreme environmental conditions.

Covers:

Base covers are fabricated from 20-gauge galvanized steel and finished with a corrosion-resistant powder coat to provide a clean, seamless transition from base to pole.

INSTALLATION

Installation by qualified electrician.

WARRANTY**Standard Warranty:**



2-Year Limited Warranty covering defects in materials and workmanship.

Extended Warranty Options:

5-Year and 7-Year extended warranty programs available for increased long-term coverage (Finish Only).



3/4x18" or 3/4x30"

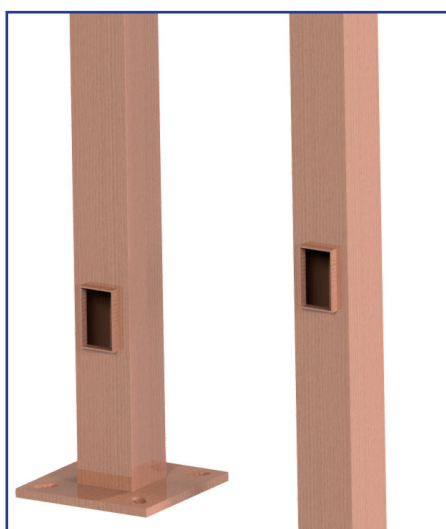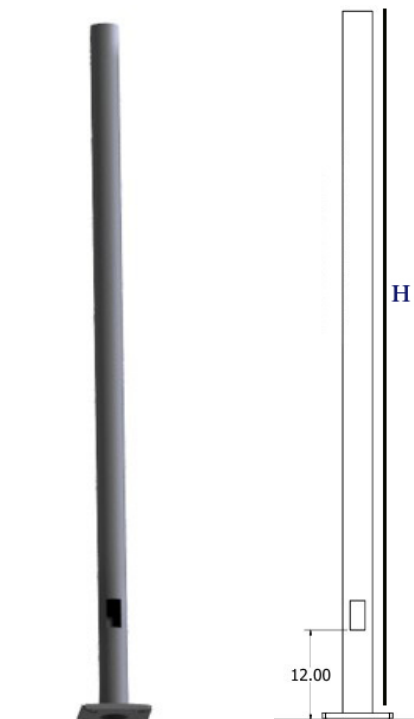

Now Available With Faux Wood Grain Finish


ORDERING GUIDE

MODEL	SHAFT	WALL THICKNESS	HEIGHT	OPTIONS	PRIMER	FINISH
Model POLE-RAP (Round Aluminum Anchor Plate)	Shaft 3 - 3" RD 4 - 4" RD 4.5 - 4.5" RD 5 - 5" RD 6 - 6" RD	Wall Thickness .188 - .188 Wall .25 - .25 Wall	Height 10' 12' 15' 18' 20' 25' 30'	Options 190 - (1) 90 Degree Hole 2180 - (2) 180 Degree Holes GFCI - GFCI Receptacle GFCILOCK - GFCI Lock TENON 2 3/8 x 3 EYE - Eye Hooks	Primer(Optional) P - Primer Coat (Recommended for Coastal Environments)	Finish DB - Dark Bronze BL - Black AS - Anodized Silver WH - White CC - Custom Color WGF - Faux Wood Grain Finish


Customer is responsible for providing **fully dimensioned drill patterns when using heads from other manufacturers; otherwise, the standard Divine Lighting drill pattern will be used.

Customer must **specify the orientation of fixtures on the pole when ordering. This information can be found in the options section, e.g. 190, 2180, etc.


**Divine Lighting is not responsible for inconsistencies between poles, fixtures, and parts produced by different manufacturers, and cannot guarantee proper fitting between such components.

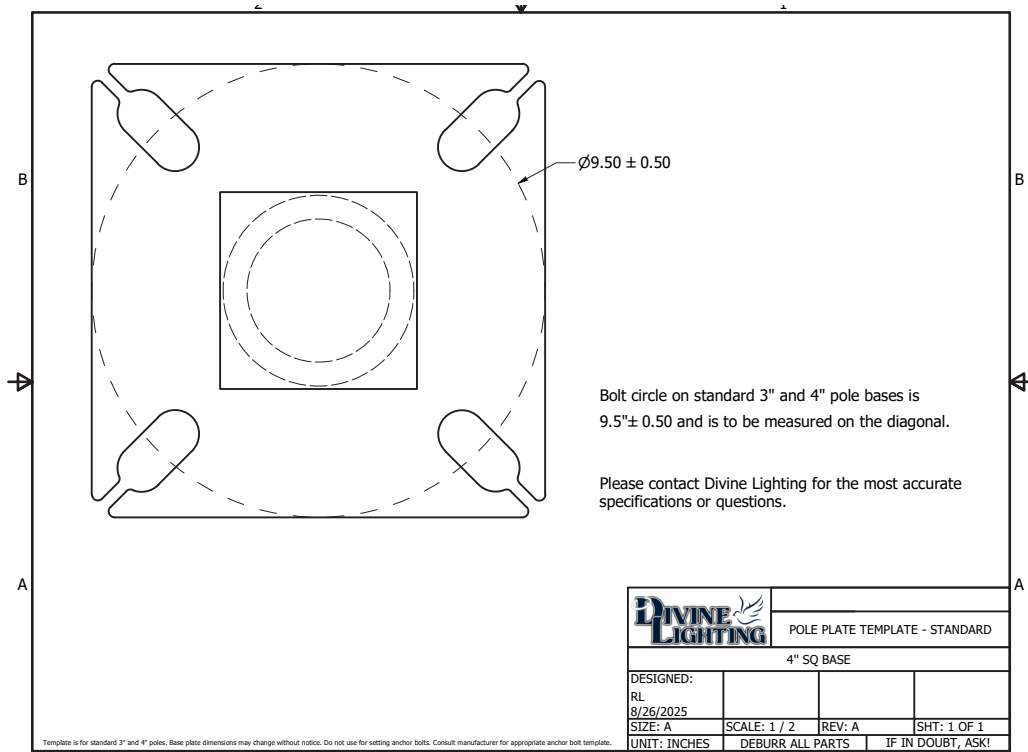

3" & 4" Pole Template

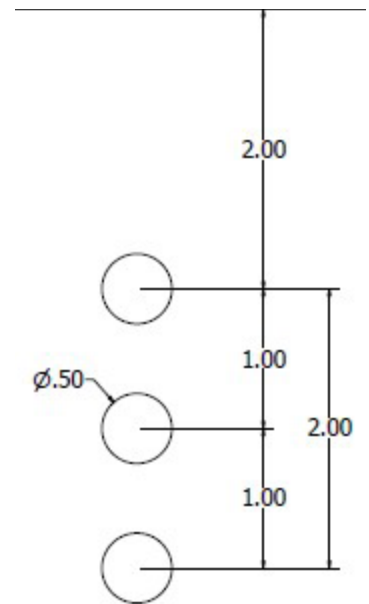

Divine Standard Drill Pattern

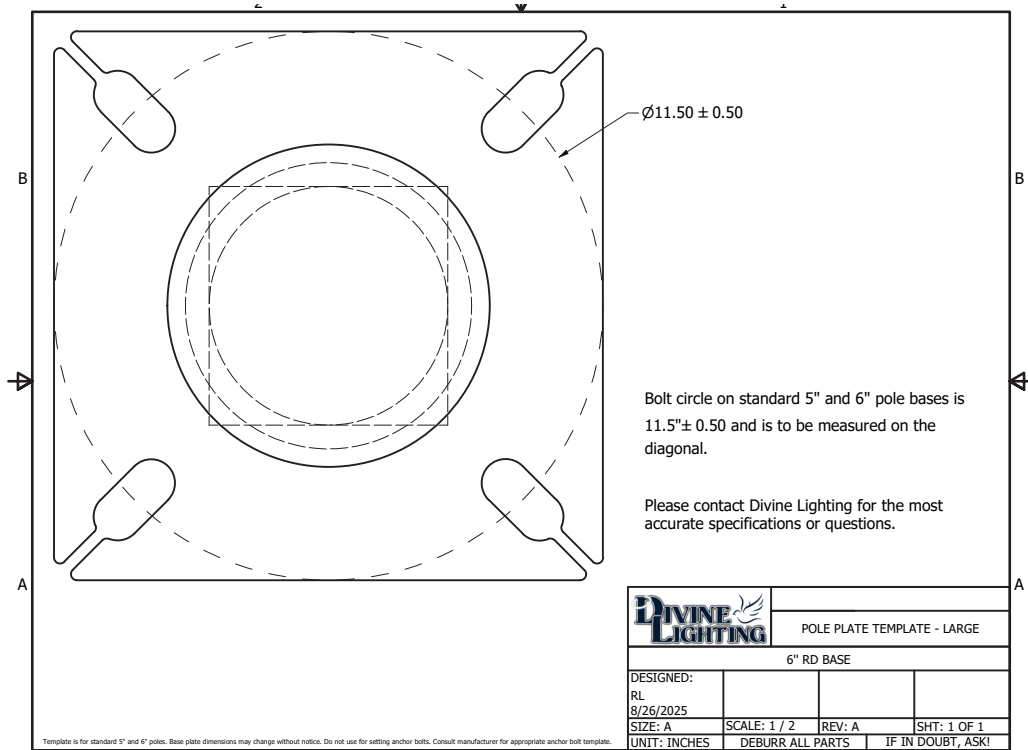

5" & 6" Pole Template

Pole shaft is fabricated from **seamless extruded 6063-T6 aluminum alloy** and designed for decorative area and site lighting applications.

All welds are ground smooth and blended to provide a clean architectural appearance.

All exposed hardware shall be stainless steel.