


ROUND STEEL TAPERED POLE SERIES



Round Steel Anchor Base Tapered Pole For Area & Site Lighting Applications

CONSTRUCTION

Pole Shaft:

Manufactured from A500 Grade B minimum structural steel: hot rolled, cold formed, and seam welded, conforming to ASTM A500 with a minimum yield strength of 46,000 psi. Available at heights of 20', 25', or 30'. Poles can be drilled for side-mounted area lights and are compatible with different tenon sizes.

Hand Hole:

3" x 5" Round cast iron reinforced hand hole located 18" above the pole base. Galvanized steel cover and stainless-steel screws provided.

Base:

Manufactured from steel plate, measures 10.91" Sq. x 5"H with either 6.1", 6.7" or 7.28" inner diameter depending on pole size ordered.

Anchor Bolts:

(4) Hot dip galvanized steel bolts. Bolts are 1" x 36". (2) washers and (2) nuts are provided per bolt.

Grounding Washer:

Grounding washer provided inside hand hole. Grounding bolt not provided.

Finishes:

All fixtures are phosphate pre-treated for corrosion resistance and superior bonding, then finished in a TGIC polyester weather resistant powder coated finish. All finishes are applied directly in-house in our state-of-the-art, purpose-built spray booths. Standard finishes are finely textured and available in Dark Bronze, Black, Anodized Silver, and White colors. Custom colors and finishes available upon request. Faux Wood Grain Finish Option Available. Optional primer coat available for extended protection.

Covers:

Base covers are fabricated from 20-gauge galvanized steel and finished with a corrosion-resistant powder coat to provide a clean, seamless transition from base to pole.

INSTALLATION

Installation by qualified electrician.

WARRANTY

Standard Warranty:

2-Year Limited Warranty covering defects in materials and workmanship.

Extended Warranty Options:

5-Year and 7-Year extended warranty programs available for increased long-term coverage (Finish Only).



1" x 36"

ORDERING GUIDE


MODEL/SHAFT/GAUGE/HEIGHT	OPTIONS	PRIMER	FINISH
Model POLE-RSTP-6-11-20 (Round Steel Tapered Pole, 6" Shaft, 11 Gauge, 20' Height) POLE-RSTP-6.5-11-25 (Round Steel Tapered Pole, 6.5" Shaft, 11 Gauge, 25' Height) POLE-RSTP-7-7-30 (Round Steel Tapered Pole, 7" Shaft, 7 Gauge, 30' Height)	Options 190 - (1) 90 Degree Hole 2180 - (2) 180 Degree Holes GFCI - GFCI Receptacle GFCILOCK - GFCI Lock TENON 2 3/8 x 3 EYE - Eye Hooks FHH - Flush Hand Hole	Primer(Optional) P - Primer Coat (Recommended for Coastal Environments)	Finish DB - Dark Bronze BL - Black AS - Anodized Silver WH - White CC - Custom Color WGF - Faux Wood Grain Finish

**Customer is responsible for providing fully dimensioned drill patterns when using heads from other manufacturers; otherwise, the standard Divine Lighting drill pattern will be used.


**Customer must specify the orientation of fixtures on the pole when ordering. This information can be found in the options section, e.g. 190, 2180, etc.

**Divine Lighting is not responsible for inconsistencies between poles, fixtures, and parts produced by different manufacturers, and cannot guarantee proper fitting between such components.


BOLT TEMPLATES

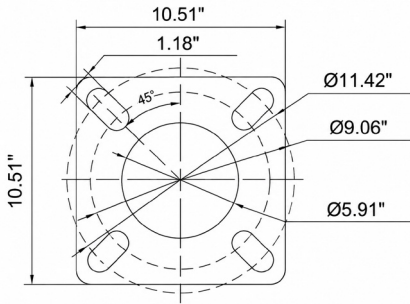

6" SHAFT

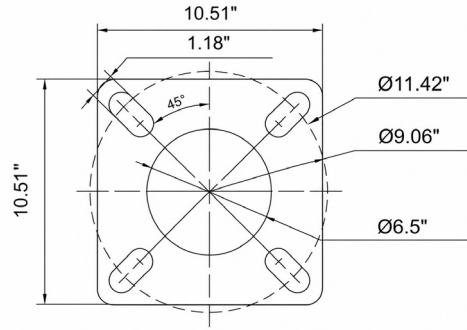

6.5" SHAFT

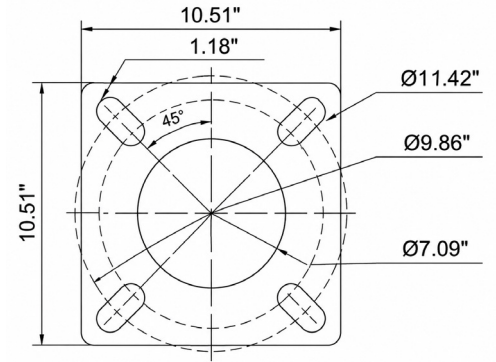

7" SHAFT

EPA/WEIGHT CHART

Shaft Size	Gauge	Height	Weight	EPA 70 MPH	EPA 80 MPH	EPA 90 MPH	EPA 100 MPH	EPA 110 MPH	EPA 120 MPH	EPA 130 MPH	EPA 140 MPH	EPA 150 MPH	EPA 160 MPH
6"	11	20'	123	13.9	11.1	10.8	8.8	7.5	5.8	4.6	3.2	2.0	1.1
6.5"	11	25'	163	12.9	9.9	8.7	7.3	6.6	5.1	4.2	2.8	1.4	N/A
7"	7	30'	300	10.5	8.8	7.9	6.5	5.4	4.4	3.7	2.4	1.2	N/A