

Decorative Linear Luminaire Architectural Indoor Lighting Solution



SPECIFICATIONS

5"W x 3.7"H x 4'L / 8'L

Weight(50W): 6.06 lbs

Weight(90W): 13 lbs

PERFORMANCE

Delivered Lumens:

3,600 – 13,700 lumens (depending on configuration)

Wattage:

25W – 90W LED System (**Wattage Selectable**)

Efficacy:

Up to 167 lm/W

LED Lumen Maintenance:

L70 ≥ 100,000 hours

(ANSI/IES TM-21-21 projection based on LM-80 testing with 17,000-hour test data at Ts = 85°C)

Typical Application Life:

Projected LED life exceeds 100,000 hours under 25°C ambient operating conditions.

Color Characteristics:

CCT: 3500K / 4000K / 5000K (**CCT Selectable**)

CRI: ≥80 standard

Beam Angle:

120° Beam Angle

Thermal Management:

Engineered heat dissipation system designed to maintain LED operating temperature for long-term lumen maintenance and system reliability.

Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at 25°C (±5°C). Specifications are subject to change without notice.

ELECTRICAL

Input Voltage:

120/277V

Dimming:

0–10V (DIM Option)

Driver:

Programmable LED Driver

Power Factor >0.92

Total Harmonic Distortion (THD) <20%

Surge Protection:

Built-In Standard Surge Protection with 6KV

LEDs:

High-efficacy LEDs mounted to metal-core circuit boards for optimized thermal management.



CONSTRUCTION

Housing:

Thick Polycarbonate Housing with Stainless Steel Clips

Finish:

Corrosion-resistant Super Durable Powder Coat Finish

Optics:

White Polycarbonate Lens

LED Source:

Integrated LED Array

INSTALLATION

Installation by qualified electrician.

LISTINGS

UL Listed for Wet Locations.

Conforms to UL 1598 and CSA standards.


WARRANTY

Standard 2-Year Limited Warranty

Optional 5-Year and 7-Year Extended Warranties Available

Rated for -30°C to 50°C ambient operating temperature.

Note: Specifications subject to change without notice. Actual performance may vary depending on installation environment and operating conditions.

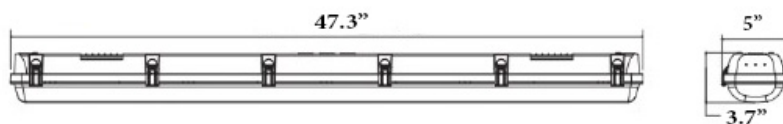

ORDERING GUIDE

MODEL / PERFORMANCE	KELVIN	MOUNT	OPTIONS
Model / Performance VPM4 -WH-LED50 Adjustable 80W / 35W / 25W VPM8 - WH-LED90 Adjustable 90W / 75W / 60W	Kelvin (CCT Selectable) CCT Selectable 35K / 40K / 50K	Mount CHXX - Chain Mount *Specify Chain Length in Inches SM - Surface Mount SW - Steel Wire Mount	Options 5Y - 5 Year Warranty 7Y - 7 Year Warranty EM8 - 800 Lm Emergency Backup MOT - Motion Sensing PC - Photocell